



aerospace  
climate control  
**electromechanical**  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



## ETH Electro Cylinder

Parker High Force Electro Thrust Cylinder

Catalog No. 201510AKD



ENGINEERING YOUR SUCCESS.



#### ***WARNING – USER RESPONSIBILITY***

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

## High Force Electro Thrust Cylinder - ETH


<b>Overview .....</b>	<b>5</b>
<b>Technical Characteristics.....</b>	<b>8</b>
<b>Step by Step Selection Process .....</b>	<b>10</b>
<b>Calculating Required Axial Force.....</b>	<b>11</b>
<b>Selection of the Size and Screw Lead.....</b>	<b>12</b>
<b>ETH - Electro Thrust Cylinder for ATEX Environment .....</b>	<b>12</b>
<b>Lifetime .....</b>	<b>13</b>
<b>Permissible Axial Thrust Forces.....</b>	<b>15</b>
<b>Permissible Side Load .....</b>	<b>17</b>
<b>Stroke, Usable Stroke and Safety Travel.....</b>	<b>19</b>
<b>Relubrication .....</b>	<b>20</b>
<b>Dimensions .....</b>	<b>21</b>
<b>Motor Mounting Options .....</b>	<b>22</b>
<b>Motor and Gearbox Selection.....</b>	<b>25</b>
<b>Mounting Methods .....</b>	<b>26</b>
Standard.....	26
Center Trunnion Mounting.....	26
Rear Eye Mounting.....	27
Rear Clevis .....	27
Rear Plate .....	29
Front Plate.....	29
Front and Rear Plate.....	29
Foot Mounting .....	30
Mounting Flanges .....	31
<b>Cylinder Rod Version .....</b>	<b>32</b>
External thread .....	32
Internal Thread .....	32
Rod Clevis.....	32
Spherical Rod Eye .....	33
Alignment Coupler.....	33
Outrigger Bearing .....	34
<b>Accessories.....</b>	<b>38</b>
Force sensors - Joint head with integrated force sensor with optional joint head.....	38
Force sensors - Rear clevis with force sensor .....	40
Initiators / Limit Switches.....	42
<b>Drive Train Selection .....</b>	<b>43</b>
Example for Sizing with Predefined Drive Trains .....	43
Predefined Motion Packages ETH032 .....	44
Predefined Motion Packages ETH050 .....	46
Predefined Motion Packages ETH080 .....	48
Predefined Motion Packages ETH100, ETH125 .....	50
Predefined Motion Packages ETH032, ETH050, ETH080 (P-Series).....	52
<b>Order Code.....</b>	<b>54</b>

# Parker Hannifin

## The global leader in motion and control technologies A world class player on the local stage

### Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

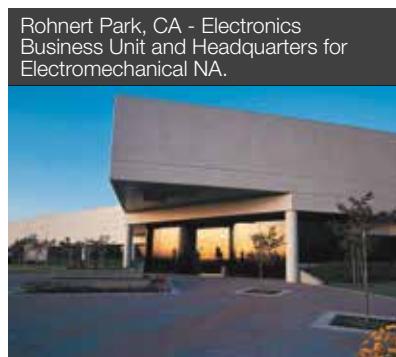

### Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

### Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

### Local Manufacturing and Support

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout North American and around the globe. For contact information, please refer to the sales offices on the back cover of this document or visit [www.parker.com](http://www.parker.com)

#### Parker Electromechanical's Worldwide Manufacturing Locations

##### North America

- Rohnert Park, CA
- Irwin, PA
- New Ulm, MN
- Wadsworth, OH
- Charlotte, NC

##### Europe

- Littlehampton, UK
- Dijon, France
- Offenburg, Germany
- Filderstadt, Germany
- Milan, Italy

##### Asia

- Wuxi, China
- Hwaseong-si, Korea
- Chennai, India

New Ulm, MN - Motor and Gearhead Business Unit and manufacturing.



Chennai, India



Hwaseong, Korea



Wuxi, China



# High Force Electro Thrust Cylinder - ETH

## Overview

### Description

The ETH electro cylinder closes the gap between pneumatic and hydraulic actuators; it is suitable to replace those in many applications and simultaneously increase the reliability of the production process. Taking the costs for air and oil into consideration, you will find that in most cases an electromechanical system such as the ETH electro cylinder offers the more economical solution. Combined with a wide choice of accessories, it offers many possibilities in a wide variety of fields.



### Typical areas of application

- Material handling and feed systems
  - wood and plastic working industry
  - vertical actuators for loading machine tools
  - in the textile industry for tensioning / gripping textile fabrics
  - in the automotive industry for transporting and feeding components
- Testing equipment and laboratory applications
- Valve and flap actuation
- Pressing
- Packaging machinery
- Process automation in the food and beverage industry

### Features

- Unrivaled power density - high forces and small frame sizes
- Cabling can be concealed in the profile
- Accessories with integrated force sensors help to allot and even to control forces precisely
- Optimized for safe handling and simple cleaning
- High service life
- Reduced maintenance costs thanks to lubricating access in the cylinder flange
- Easy replacement due to pneumatic ISO flange norm (DIN ISO 15552:2005-12) conformity
- Integrated anti-rotation device
- Reduced noise emission
- All from one source  
We offer the complete drive train: Drive controllers, motors and gearboxes to match the Electro Cylinder

### Technical Characteristics - Overview

Type	ETH Electro Cylinder
Frame sizes	ETH032 / ETH050 / ETH080 / ETH100 / ETH125
Screw lead	5, 10, 16, 20, 32 mm
Stroke	up to 2000 mm
Traction/thrust force	up to 114 000 N
Speed	up to 1.7 m/s
Acceleration	up to 15 m/s <sup>2</sup>
Equivalent dynamic axial force at a lifetime of 2500 km	up to 49 600 N
Efficiency	up to 90 %
Repeatability	up to ± 0.03 mm
Protection classes	IP54 IP54 with stainless screws IP65
Drive	Inline: Axial drive or parallel drive with high performance toothed belt
Directives	2011/65/EC: Conform to RoHS  94/9/EC: ATEX  Equipment group II Category 2 Please contact Parker for details
Classification	II 2G Ex c IIC T4 EPS 13 ATEX 2 592 X (ETH032 / ETH050) II 2G Ex c IIB T4 EPS 13 ATEX 2 592 X (ETH080 / ETH100)

### We also offer customized solutions:

If your application requires a special version of the ETH cylinder, please contact your local Parker Sales Office.

- Oil splash lubrication
- Customized mountings and rod ends
- Mounting of customer motors
- Preparation of the cylinder for use under aggressive environmental conditions
- Overlong thrust rod
- Polished thrust rod
- Thrust rod hard-chrome plated

## Parker High Force Electro Thrust Cylinder


Parallel Type



Inline Type



## Product Design

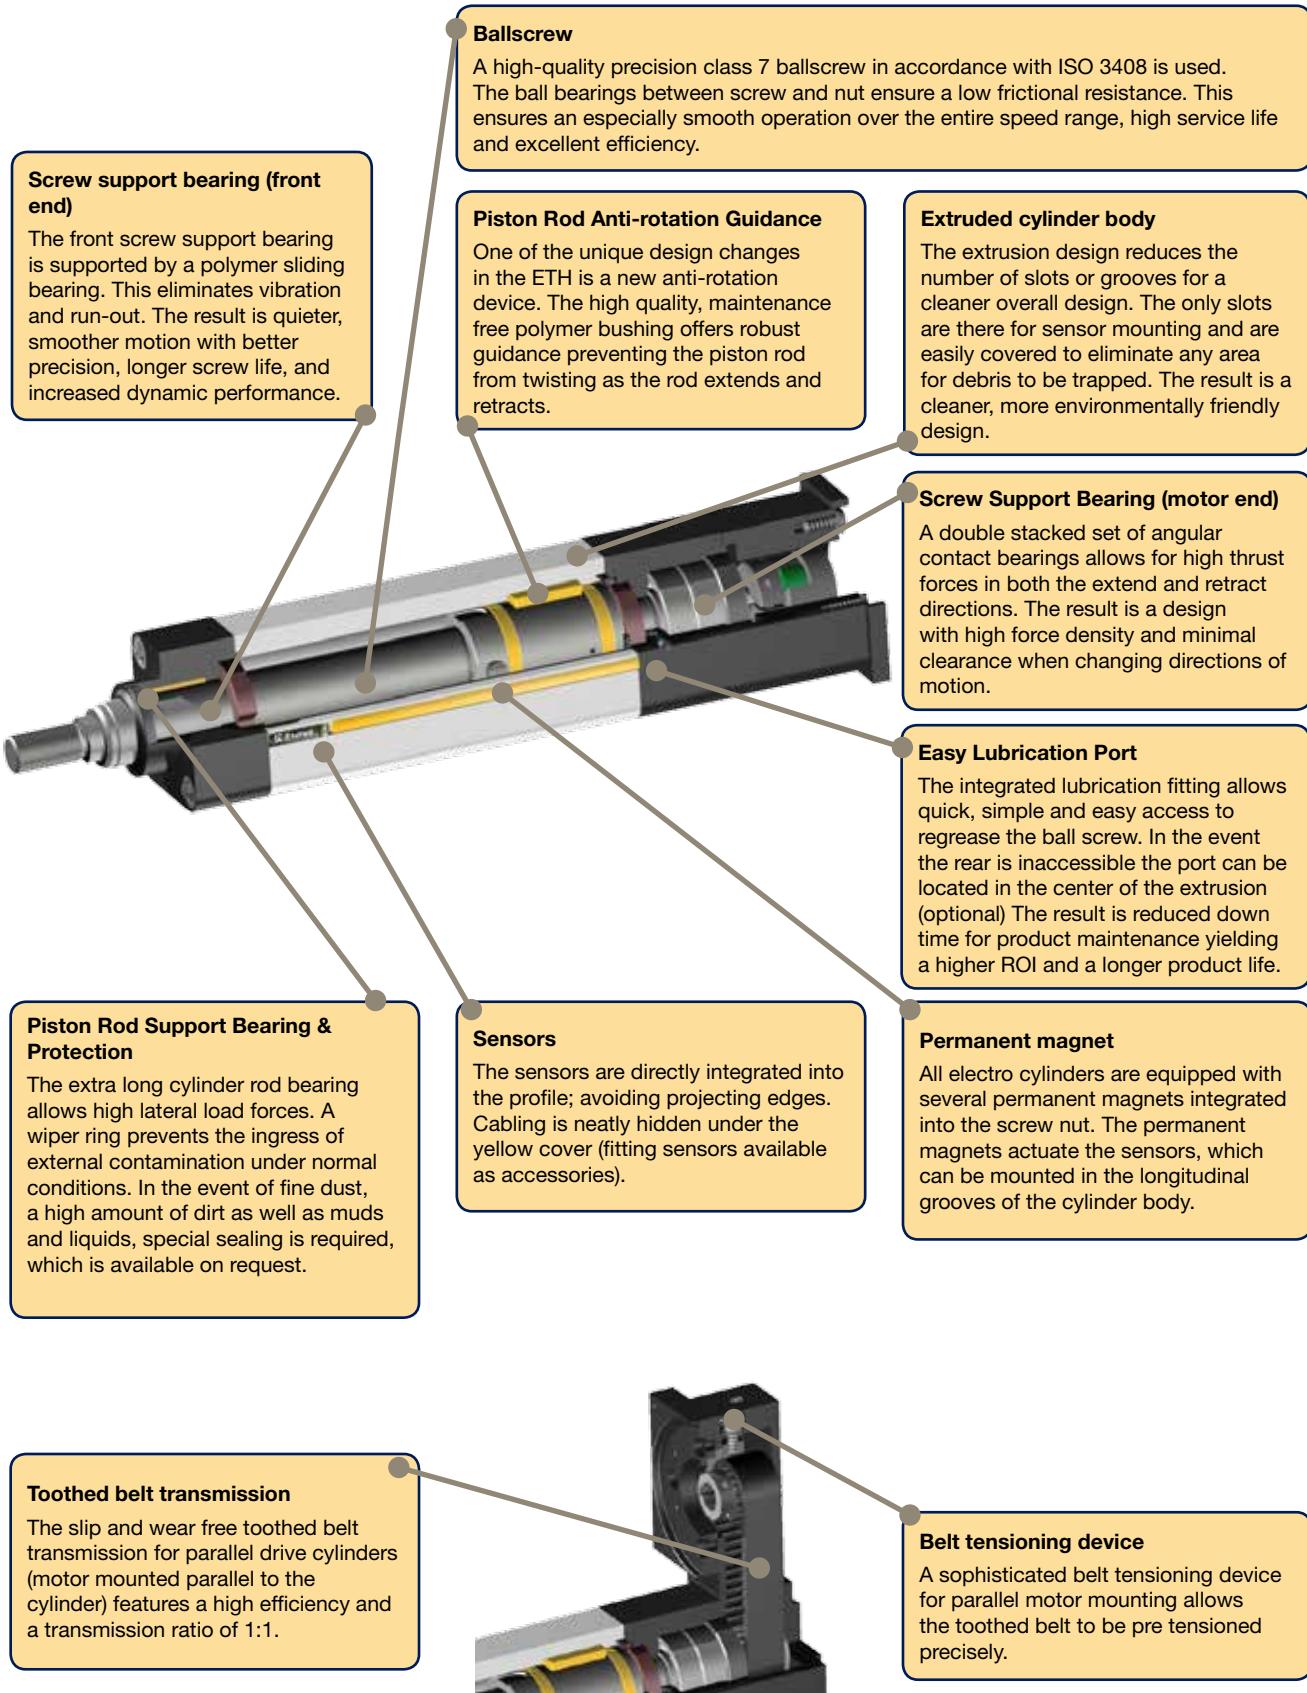



Cylinder size type	Unit	ETH100		ETH125 <sup>3)</sup>	
		M10	M20	M10	M20
Screw lead	[mm]	10	20	10	20
Screw diameter	[mm]		50		63

#### Travels, speeds and accelerations

Available strokes <sup>1) 2)</sup>	[mm]	continuous from 100- 2000 & standard strokes	continuous from 100- 2000 & standard strokes		
Max. permissible speed at stroke =					
100-400 mm	[mm/s]	400	800	417	833
500 mm	[mm/s]	400	747	417	807
600 mm	[mm/s]	333	622	395	684
800 mm	[mm/s]	241	457	290	514
1000 mm	[mm/s]	185	354	224	405
1200 mm	[mm/s]	148	284	180	329
1400 mm	[mm/s]	122	235	148	275
1600 mm	[mm/s]	102	198	125	234
2000 mm	[mm/s]	76	148	94	170
Max. Acceleration	[m/s <sup>2</sup> ]	8	10	8	10

#### Forces

Max. axial traction/thrust force motor inline	[N]	54 800	56 000	88 700	114 000
Max. axial traction/thrust force depending on the motor speed n	n < 100 min <sup>-1</sup>		50 800		81 400
	100 < n < 300 min <sup>-1</sup>		43 200	76 300	73 700
Motor parallel	n > 300 min <sup>-1</sup>		35 600		61 000
Equivalent dynamic axial force at a lifetime of 2500 km	[N]	18 410	27 100	27 140	49 600

#### Max. transmissible torque / force constant

Max. transmissible torque inline motor	[Nm]	100	200	150	400
Max. transmissible torque depending on the motor speed n	n < 100 min <sup>-1</sup>		200		320
	100 < n < 300 min <sup>-1</sup>	108	170		290
Motor parallel	n > 300 min <sup>-1</sup>		140		240
Force constant motor inline <sup>5)</sup>	[N/Nm]	565	283	565	283
Force constant motor parallel <sup>5)</sup>	[N/Nm]	509	254	509	254

#### Weight

Mass of base unit with zero stroke (incl. Cylinder rod)	[kg]	21	23	56	64
Mass of additional stroke (incl. Cylinder rod)	[kg/m]		39		62
Weight of cylinder rod with zero stroke	[kg]		1.2		2.9
Weight of cylinder rod - additional length	[kg/m]		7.8		14.4

#### Mass moments of inertia

Motor parallel without stroke	[kgmm <sup>2</sup> ]	5860	6240	17 050	17 990
Motor inline without stroke	[kgmm <sup>2</sup> ]	2240	2620	12 960	13 400
Parallel/inline motor per meter	[kgmm <sup>2</sup> /m]	4270	4710	10 070	10 490

#### Accuracy: Bidirectional Repeatability (ISO230-2)

Motor inline	[mm]	±0.03
Motor parallel	[mm]	±0.05

#### Efficiency

Motor inline	the efficiency includes all friction torques	[%]	90
Motor parallel		[%]	81

#### Ambient conditions

Operating Temperature	[°C]	-10...+70
Ambient temperature	[°C]	-10...+40
Storage temperature	[°C]	-20...+40
Humidity	[%]	0...95 % (non-condensing)
Location height range	[m]	max. 3000

<sup>1)</sup> "Order Code" (page 54), <sup>2)</sup> Intermediate stroke lengths may be interpolated.

<sup>3)</sup> ATEX on request, <sup>5)</sup> The efficiency factors are included in the force constants.


**Technical Data apply under normal conditions and only for the individual operating and load modes. In the case of compound loads, it is necessary to verify in accordance with normal physical laws and technical standards whether individual ratings should be reduced. In case of doubt please contact Parker.**

## Step by Step Selection Process

The following sizing steps help you to find the suitable electro cylinder. Select an electro cylinder using estimated application data. Calculate the actually required application data following the dimensioning steps described below. If your application's requirements exceed a maximum value, please choose a larger electro cylinder and recheck the maximum values. Perhaps, a smaller electro cylinder can also meet the requirements.

### Automated dimensioning with the help of the "EL Sizing Tool"

A dimensioning tool simplifies the dimensioning process. Download under:  
[www.parker.com/eme/eth](http://www.parker.com/eme/eth)

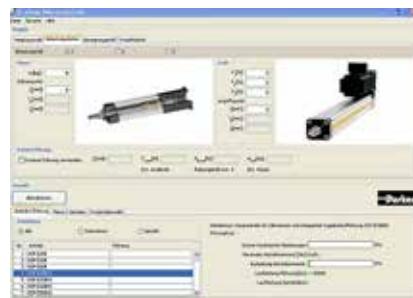


Step	Application data	Selection	With the aid of ...
1	Accuracy, ambient conditions	Check the basic conditions for the use of the ETH in your application.	"Technical Characteristics" (page 8)
2	Required space	Check the space available in your application and choose the motor mounting option: inline or parallel.	"Dimensions" (page 21)
3	Axial forces	Calculation of the axial forces in the individual segments of the application cycle.	"Calculating Required Axial Force" (page 11)
4	Maximum force required	Determination of the maximum required axial force (traction and thrust force)	Determination of the maximum required axial force (page 12)
		Selection of the cylinder via the maximum axial traction/thrust force (please use the characteristics of your desired motor mounting option: inline or parallel).	"Technical Characteristics" (page 8)
5	Maximum speed	Selection of the screw lead for the desired cylinder.	"Technical Characteristics" (page 8)
6	Maximum Acceleration	Please check if the maximum acceleration is sufficient.	"Technical Characteristics" (page 8)
7	Select stroke	Selection of the desired stroke: Determine required stroke from usable stroke and safety travels	"Stroke, Usable Stroke and Safety Travel" (page 19)
		select the desired stroke from the list of standard strokes or, if the desired stroke is not listed: Define the length of the usable stroke in steps of one mm. Caution! Please respect the minimum and the maximum possible stroke	"Order Code" (page 54) "Technical Characteristics" (page 8)
8	Permissible thrust force taking the buckling risk into consideration	Check the maximum thrust force depending on the stroke and the mounting variant. Maybe your application can also be realized with a different mounting variant allowing to attain the maximum thrust force.	"Permissible Side Load" (page 17)
9	Service life	Determining the service life with the aid of an equivalent axial force, the operational environment (application factor) and the service life diagrams.	"Lifetime" (page 13)
10	Permissible side load	Determine the lateral forces of your application and compare them to the permissible lateral forces (depending on the stroke).	Side load (page 17) Diagrams (page 17)
11	Relubricating cycle	Please check, if the required relubricating cycle is suitable for your production environment.	"Relubrication" (page 20)
12	Motor / gearbox	Calculation of the necessary torque to generate the required force at the ETH. Selection of a suitable motor.	"Motor and Gearbox Selection" (page 25)
13	Motor mounting flange	Selection of a suitable motor mounting flange.	"Motor Mounting Options" (page <OV>)
14	Mounting type	Selection of the electro cylinder mounting method.	"Mounting Methods" (page 26)
15	Cylinder rods	Selection of the cylinder rod end for load mounting.	"Cylinder Rod Version" (page 32)

# Calculating Required Axial Force

Formulas 1 & 2 below give the mathematical equation for calculating the thrust required to extend or retract the piston rod.

With the aid of the axial forces, it is possible to check if the electro cylinder is able to provide the required forces and if the maximum buckling load is respected. The axial forces are also used as the calculation basis for the service life.

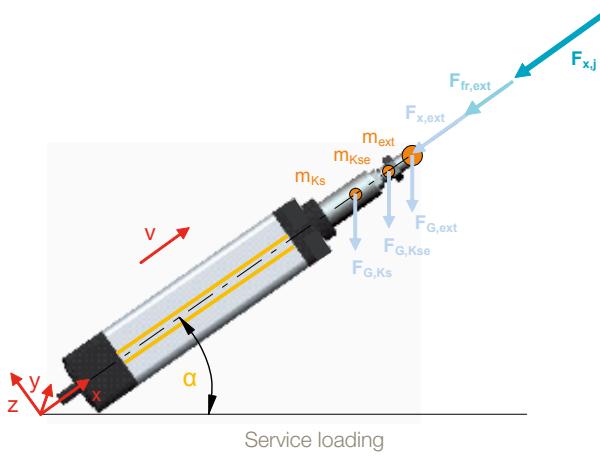

## Formula symbols (Formula 1-2)

$F_{x,a,j}$	= Axial forces during extension in N
$F_{x,e,j}$	= Axial forces during retraction in N
$F_{x,ext}$	= External axial force in N
$F_{G,ext}$	= Weight force caused by an additional mass in N
$F_{G,Kse}$	= Weight force caused by the cylinder rod end in N
$F_{G,Ks}$	= Weight force caused by the cylinder rod in N
$m_{ext}$	= Additional mass in kg
$m_{Kse}$	= Mass of the cylinder rod end in kg (see "Cylinder Rod Version" page 32)
$m_{Ks,0}$	= Mass of the cylinder rod at zero stroke in kg (see table "Technical Data" page 8)
$m_{Ks,stroke}$	= Mass of the cylinder rod per mm of stroke in kg (see table "Technical Data" page 8)
Stroke	= Selected stroke in m
$a_{K,j}$	= Acceleration at the cylinder rod in m/s <sup>2</sup>
$\alpha$	= Alignment angle in °
$F_{x,max}$	= Maximum permissible axial force in N
$F_{f,ext}$	= External friction force in N

Index "j" for the individual segments of the application cycle

## Calculation of axial forces

Determine the axial forces occurring during each individual segment of the application cycle.

### Cylinder rod extending:

$$F_{x,a,j} = F_{x,ext} + F_{f,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,stroke} \cdot \text{Stroke}) \cdot (a_{K,j} + \sin\alpha \cdot 9.81 \frac{m}{s^2})$$

Formula 1

### Cylinder rod retracting:


$$F_{x,e,j} = F_{x,ext} - F_{f,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,stroke} \cdot \text{Stroke}) \cdot (-a_{K,j} + \sin\alpha \cdot 9.81 \frac{m}{s^2})$$

Formula 2

### Sample calculation:

#### Vertical mounting

- ETH050
- Stroke = 500 mm = 0.5 m
- Pitch = 5 mm
- Rod End: External thread
- Trapezoidal velocity course
- Acceleration  $a_k = 4 \text{ m/s}^2$
- $m_{ext} = 150 \text{ kg}$
- $F_{x,ext} = 1000 \text{ N}$
- $m_{Kse} = 0.15 \text{ kg}$
- $m_{Ks,0} = 0.15 \text{ kg}$
- $m_{Ks,stroke} = 1.85 \text{ kg/m}$
- Alignment angle  $\alpha = -90^\circ$
- External friction force = 30 N

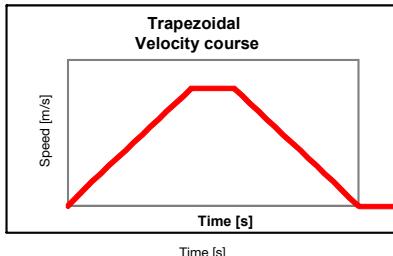

#### Thrust rod moving forth: Mass is moved downwards

##### Load case: Acceleration

$$F_{x,a,1} = 1000N + 30N + \left(150kg + 0.15kg + 0.15kg + 1.85 \frac{kg}{m} \cdot 0.5m\right) \cdot \left(4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2}\right) = 151N$$

##### Load case: Constant Velocity

$$F_{x,a,2} = 1000N + 30N + \left(150kg + 0.15kg + 0.15kg + 1.85 \frac{kg}{m} \cdot 0.5m\right) \cdot \left(0 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2}\right) = -454N$$

##### Load case: Deceleration

$$F_{x,a,3} = 1000N + 30N + \left(150kg + 0.15kg + 0.15kg + 1.85 \frac{kg}{m} \cdot 0.5m\right) \cdot \left(-4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2}\right) = -1058N$$

#### Thrust rod moving back: Mass is moved upwards

##### Load case: Acceleration

$$F_{x,e,4} = 1000N - 30N + \left(150kg + 0.15kg + 0.15kg + 1.85 \frac{kg}{m} \cdot 0.5m\right) \cdot \left(-4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2}\right) = -1118N$$

##### Load case: Constant Velocity

$$F_{x,e,5} = 1000N - 30N + \left(150kg + 0.15kg + 0.15kg + 1.85 \frac{kg}{m} \cdot 0.5m\right) \cdot \left(0 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2}\right) = -514N$$

##### Load case: Deceleration

$$F_{x,e,6} = 1000N - 30N + \left(150kg + 0.15kg + 0.15kg + 1.85 \frac{kg}{m} \cdot 0.5m\right) \cdot \left(4 \frac{m}{s^2} + \sin(-90^\circ) \cdot 9.81 \frac{m}{s^2}\right) = 91N$$

## Selection of the Size and Screw Lead

### Required maximum axial force

Determine the maximum axial force (page 11) that the electro cylinder must provide.

### Preselection of the electro cylinder

Using the calculated force required, compare the actual electro cylinder specifications (page 8) to determine which profile size will produce enough force.

Once you have determined a profile size, determine that the unit will physically fit in the space allowed by the application (including parallel or inline motor mounts).

### Required maximum velocity

The maximum velocity of the electro cylinder depends on the stroke.

With the profile size selected, refer to the critical speed information (page 8) to determine which screw lead works best for the application at the needed stroke length.

When the precise stroke is defined, the velocity must again be verified.

### Required maximum acceleration

The maximum acceleration depends on the screw lead and serves as an additional selection criterion for the suitable electro cylinder. It is listed in the "Technical Data" (page 8).

## ETH - Electro Thrust Cylinder for ATEX Environment

Parker Hannifin has extended its well known ETH - High Force Electro Thrust Cylinder for the use in explosive atmospheres (ATEX). The new ETH ATEX offers all advantages of the well known ETH Electro Thrust Cylinder and offers even in explosive atmospheres precise motion, positioning, setting and actuating.

The ETH ATEX range is ATEX certified for device group II, category 2 in explosive gas atmospheres. In conjunction with the ATEX certified EX series servomotors, Parker Hannifin offers a complete drive package for such applications.



### Target Market / Applications

A ATEX environment contains a mixture of air and flammable substances such as gas, vapor or fluids which are potentially explosive under atmospheric conditions. ATEX certificated devices are essential for the use under this conditions.

#### Typical applications:

- Oil & Gas Industry
- Chemical and pharmaceutical industries
- Food processing (distillery)
- Printing & Plastic Industry
- Energy (Generation of Bio gas, gas turbines)
- Automotive industry (Paint finish)
- Waste processing plants

### How to proceed when projecting a ATEX Cylinder

- Project an ETH - Electro Thrust Cylinder by means of this catalogue
- Check by means of the document "ETH ATEX frame conditions for applications" [192-550006] whether the selected ETH - Electro Thrust Cylinder corresponds to all ATEX demands in your application.
- In case the conditions cannot be fulfilled, please choose a larger electro cylinder and recheck the application data (e.g. changed cycle times).
- A application specific release by measuring the self-heating with your application data in our company is possible (see "ETH ATEX frame conditions for applications" [192-550006].


# Service Life

## Nominal service life<sup>1,2</sup>

The nominal service life of the electro cylinder can be determined with the aid of the diagrams page 14.

The forces calculated for each individual segment of the application cycle must be summarized into an equivalent axial force  $F_m$  "Calculating Required Axial Force" (page 11). If axial forces with different signs apply, two equivalent axial forces must be calculated:

- $F_{m1}$  for all positive forces. The negative forces will convert to zero.
- $F_{m2}$  for all negative forces. The positive forces will convert to zero.

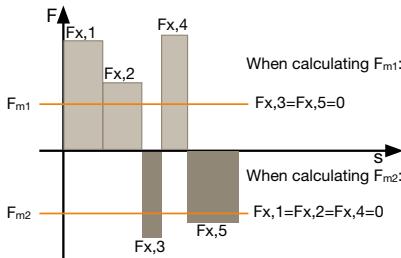

## Calculation

$$F_{m1,2} = \sqrt[3]{\frac{1}{s_{total}} (F_{x,1}^3 \cdot s_1 + F_{x,2}^3 \cdot s_2 + F_{x,3}^3 \cdot s_3 + \dots)}$$

Formula 3

With the equivalent axial forces, the nominal service life  $L$  in km can be read off the diagrams on page 14.

With **load on both sides**, the nominal service life is:

$$L = (L_1^{-1.11} + L_2^{-1.11})^{-0.9}$$

Formula 3.1

## Actual service life

The actual service life can only be approximated due to a variety of different effects. The nominal service life  $L$  calculation does, for instance, not take insufficient lubrication, impacts and vibrations or critical side loads into consideration. These effects can however be estimated with the aid of the application factor  $f_w$ .

The actual service life is calculated as follows:

$$L_{fw} = \frac{L}{f_w^3}$$

Formula 4

## Application factor $f_w$

Movement cycle	Shocks/vibrations			
	none	light	medium	heavy
More than 2.5 screw rotations	1.0	1.2	1.4	1.7
1.0 to 2.5 screw rotations <sup>3)</sup> (short stroke applications)	1.8	2.1	2.5	3.0

<sup>3)</sup>After max. 10 000 movement cycles, a lubrication run must be performed (see lubrication run intervals for short stroke applications)

## Boundary conditions for application factor $f_w$ :

- Externally guided electro cylinders
- Accelerations <10 m/s<sup>2</sup>

If your application factor is <1.5, please contact Parker.

The same applies for detailed calculations or for special boundary conditions.

## Lubrication run lengths for short stroke applications

Lengths of lubrication runs [mm]	ETH032		ETH050			ETH080			ETH100		ETH125		
	M05	M10	M16	M05	M10	M20	M05	M10	M32	M10	M20	M10	M20
	>45	>54	>58	>40	>46	>58	>47	>65	>95	>102	>140	>122	>210

## Abbreviations used (formula 3-4)

- $F_m$  = Equivalent axial force in N  
 $F_{x,j}$  = Resulting axial force in N (see formula 1 & formula 2, page 11)  
 $s_j$  = Travel given a defined force  $F_{x,a,j}$  in mm  
 $s_{total}$  = Total travel in mm  
 $L$  = Nominal service life in km (see "Service Life" diagrams page 14)  
 $L_{fw}$  = Service life respecting the application factor in km  
 $f_w$  = Application factor (see table "Application factor" page 13)

Index "j" for the individual segments of the application cycle

If you need the service life as the number of possible cycles, just divide the service life in kilometers by twice the stroke traveled.  
i.e. Standstill times are not taken into consideration when determining the equivalent axial force ( $F_m$ ), as  $s_j=0$ . Caution, do always consider the stroke as well as the return stroke.


<sup>1</sup>The nominal service life is the service life reached by 90 % of a sufficient number of similar electro cylinders until the first signs of material fatigue occur.

<sup>2</sup>ATEX cylinders feature a reduced the service life. Please note the brochure on "intended use" (192-550004).


## Diagrams <sup>2</sup>

The given values apply when adhering to the recommended lubrication intervals (see relubrication). The diagrams were established in accordance with DIN ISO 3408-5


### ETH032

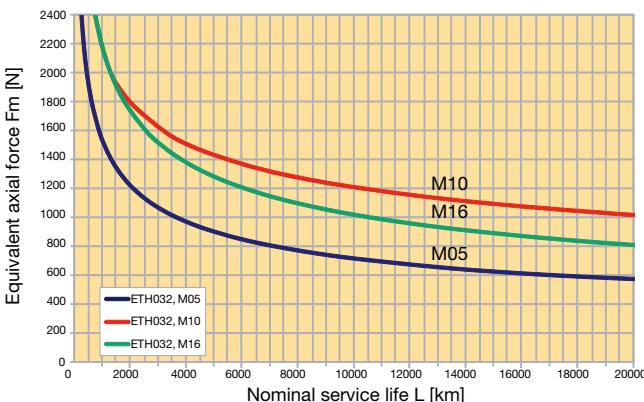


### ETH050

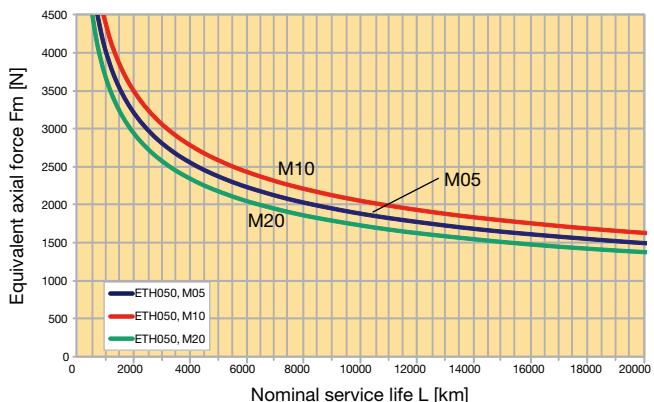


### ETH080

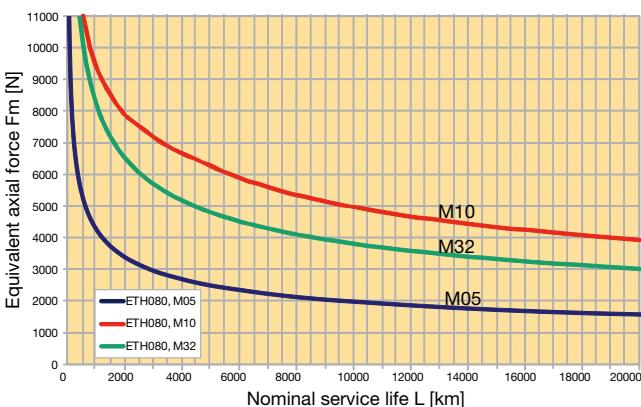

### ETH100

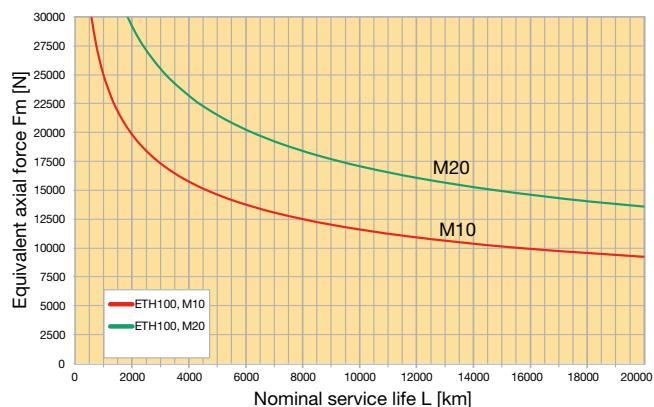

### ETH125

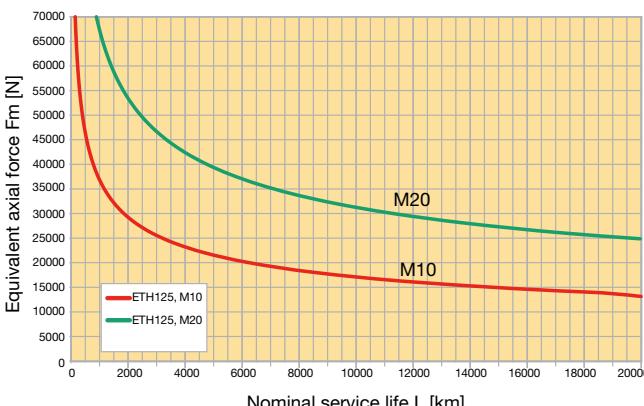

### Prerequisites for nominal service life

- Bearing and screw temperature between 20 °C and 40 °C.
- No impairment of the lubrication, for example by external particles.
- Relubrication in accordance with the specifications.
- The given values for thrust force, speed and acceleration must be adhered to at any rate.
- No approaching the mechanical end stops (external or internal), no other abrupt loads, as the given maximum

force of the cylinder may never be exceeded.

- No external side loads
- Application factor fw = 1. In order to calculate the real service life and the corresponding application factor, please refer to chapter "Service Life" see page 13
- No high exploitation of several power features at a time (for example maximum speed or thrust force).
- No regulating oscillation at standstill.

<sup>2</sup>ATEX cylinders feature a reduced service life. Please note the brochure on "intended use" (192-550004).

# Permissible Axial Thrust Forces

Limited by the risk of buckling, depending on the stroke and the mounting method; traction forces do not pose any buckling risk.


Please check if the maximum axial force ((page 11)) is possible with the planned mounting method and for the desired stroke

## Diagrams

### Case 1

Cylinders fixed with mounting flanges, foot mounting or mounting plates.


Cylinder always fixed at the front end as well.  
Thrust rod with axial guiding.

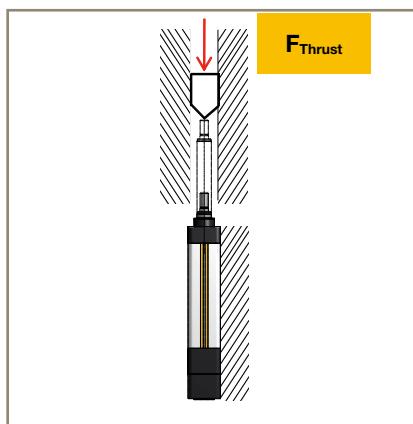

### Case 2

Cylinders fixed with mounting flanges, foot mounting or mounting plates.


Cylinder always fixed at the front end as well.  
Thrust rod without axial guiding. External force applied axially with respect to cylinder axis.

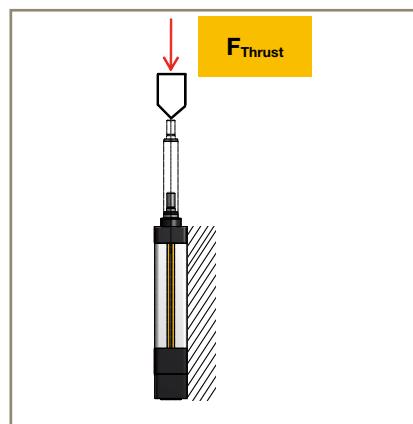


### Case 3

Cylinder mounted with center trunnion, rear clevis or any other rear fixing material (e.g. rear mounting plate).


Thrust rod with axial guiding.

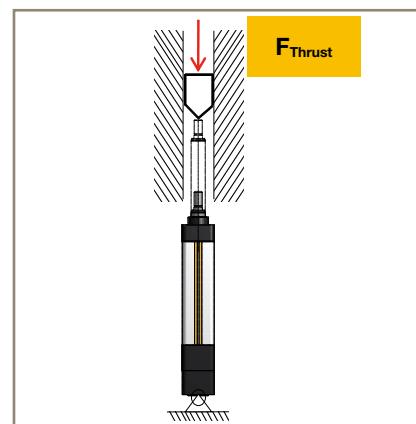


**ETH032 - Case 1**

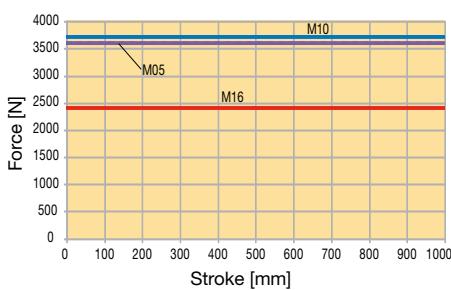


**ETH032 - Case 2**

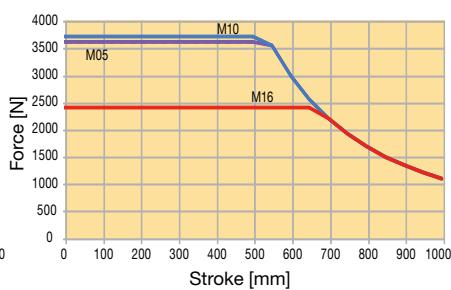


**ETH032 - Case 3**

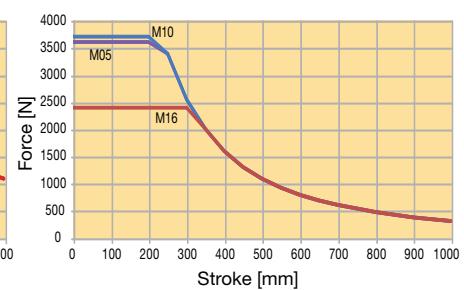


**ETH050 - Case 1**

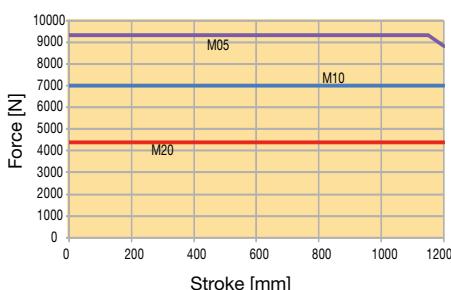

**ETH050 - Case 2**

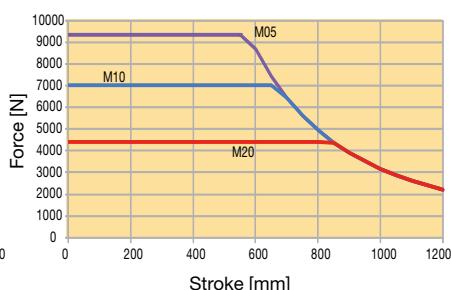


**ETH050 - Case 3**

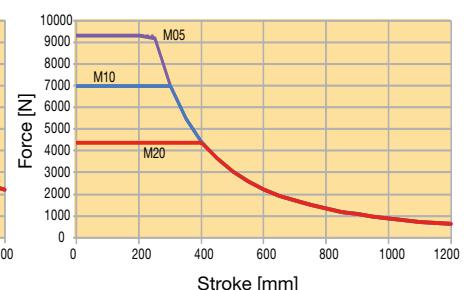

**ETH - Electro Cylinder**  
Permissible Axial Thrust Forces


**Case 1**

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Cylinder always fixed at the front end as well.  
Thrust rod with axial guiding.

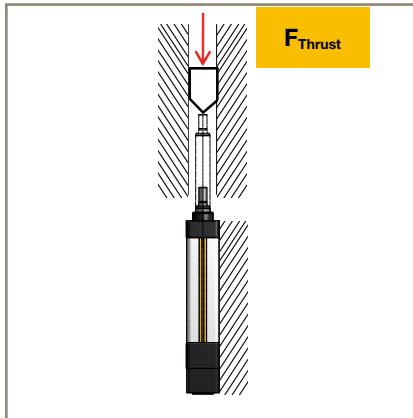


**Case 2**

Cylinders fixed with mounting flanges, foot mounting or mounting plates.  
Cylinder always fixed at the front end as well.  
Thrust rod without axial guiding. External force applied axially with respect to cylinder axis.

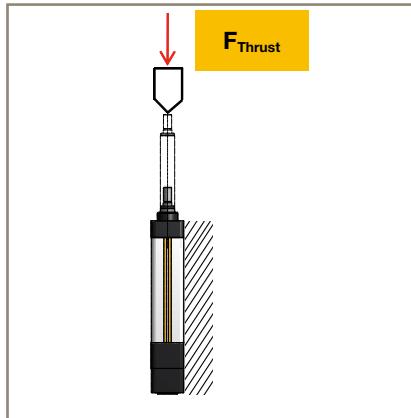


**Case 3**


Cylinder mounted with center trunnion, rear clevis or any other rear fixing material (e.g. rear mounting plate).  
Thrust rod with axial guiding.

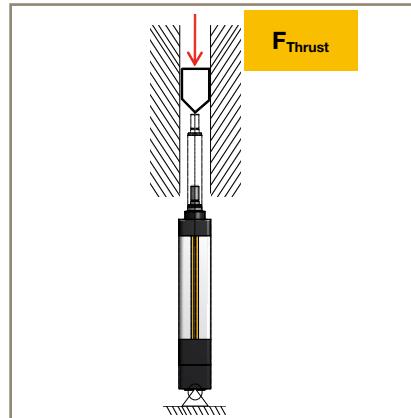


**ETH080 - Case 1**

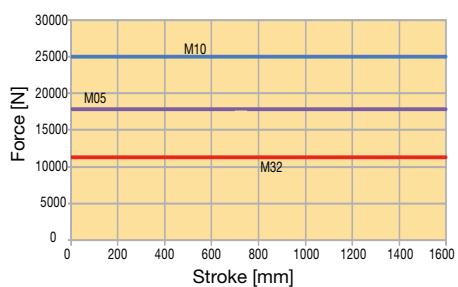


**ETH080 - Case 2**

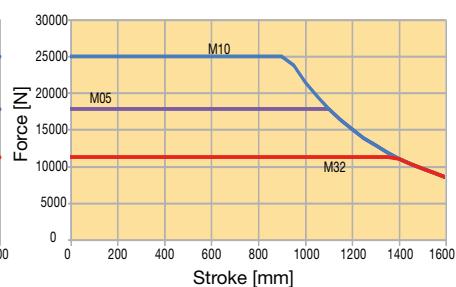


**ETH080 - Case 3**

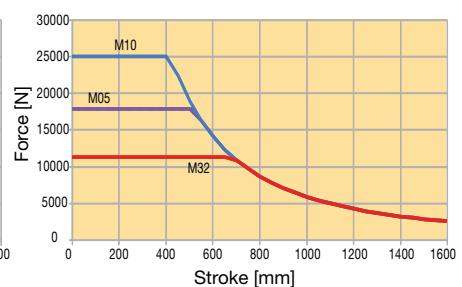


**ETH100 - Case 1**

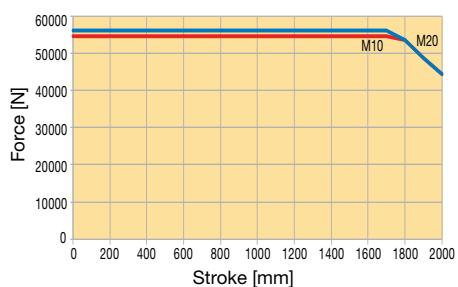


**ETH100 - Case 2**

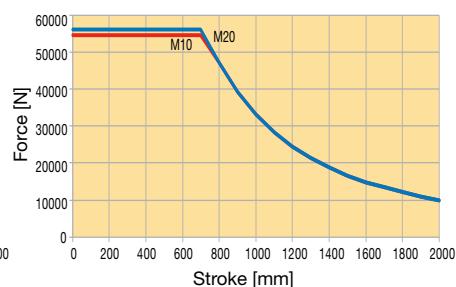


**ETH100 - Case 3**

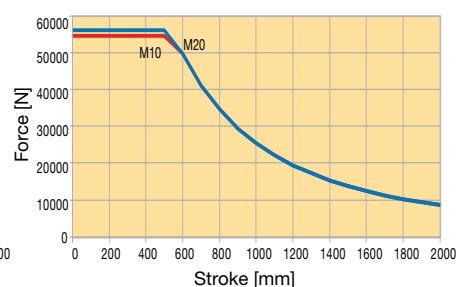


**ETH125 - Case 1**

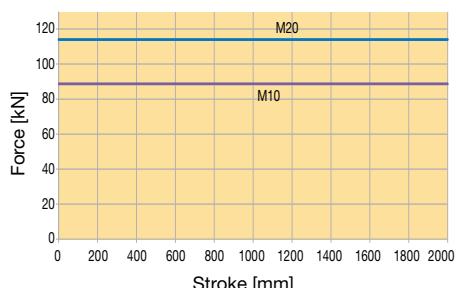

**ETH125 - Case 2**

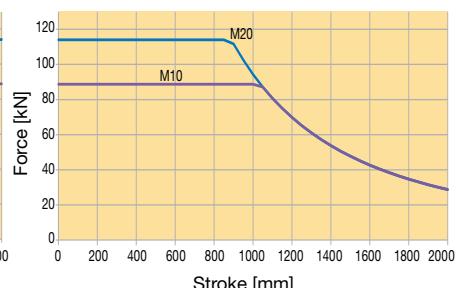


**ETH125 - Case 3**

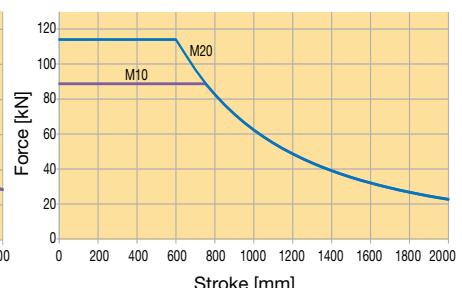


# Permissible Side Load <sup>1)</sup>

The electro cylinder features a generously dimensioned cylinder rod and screw nut bearing in the form of high-quality plastic sliding elements to absorb the side load. Please note that electro cylinders with a longer stroke permit a higher lateral force at the same extension length. It may therefore be useful to choose a longer stroke.


## Permissible lateral forces in vertical mounting position

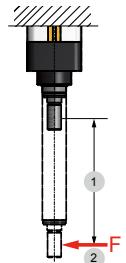

**ETH032**

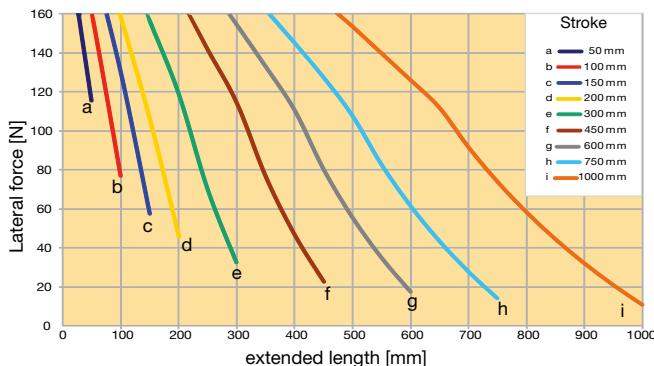


**ETH050**

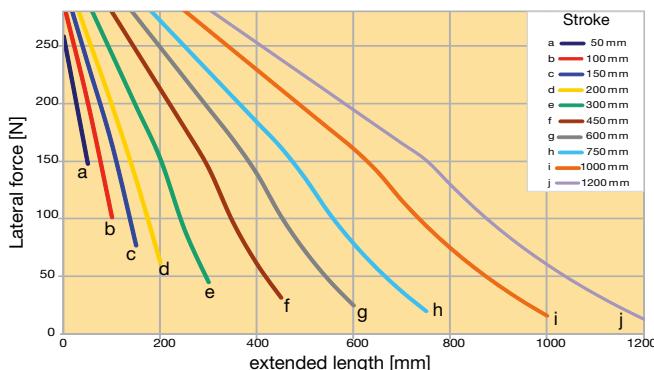

than required for the application in order to increase the permissible lateral force.


If the permissible lateral forces are exceeded or if the maximum axial force occurs at the same time, the optional outrigger bearing (option R) must be used.

## Permissible lateral forces in horizontal mounting position

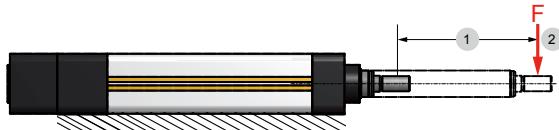


1: Extended length  
2: Force application - at the middle of the cylinder rod thread

**ETH032**

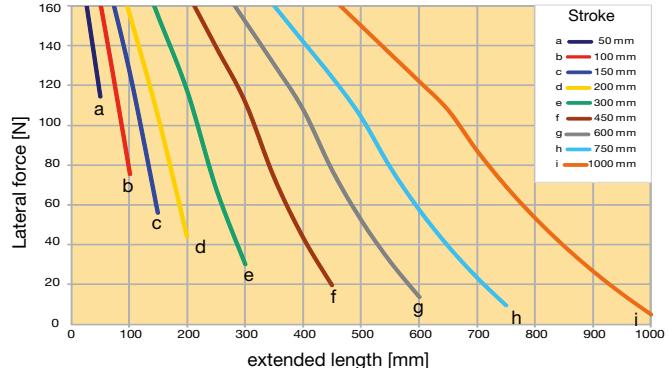


**ETH050**

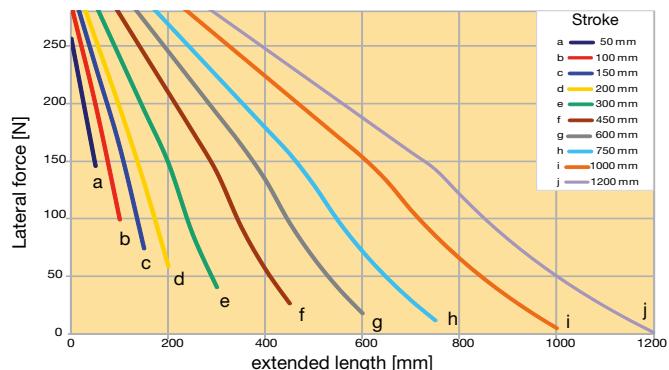


The diagrams apply for an ambient temperature of 20 °C, for all housing orientations and a medium travel speed of 0.5 m/s, (ETH032, ETH050, ETH080) or 0.25 m/s (ETH100, ETH125).

<sup>1)</sup> For ATEX cylinders, side loads are not permitted!


**Permissible lateral forces in vertical mounting position**

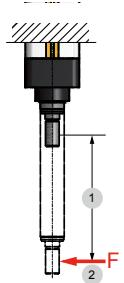


**ETH080**

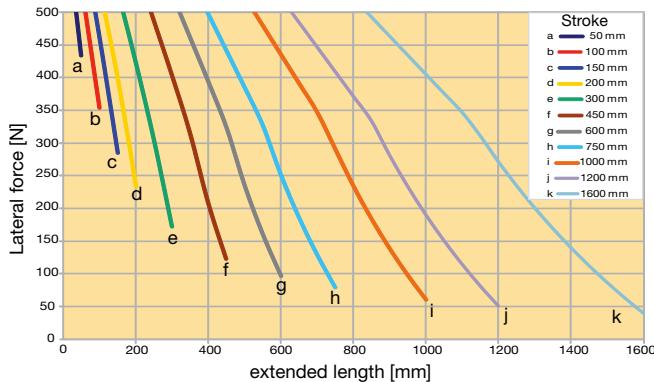

**ETH100**

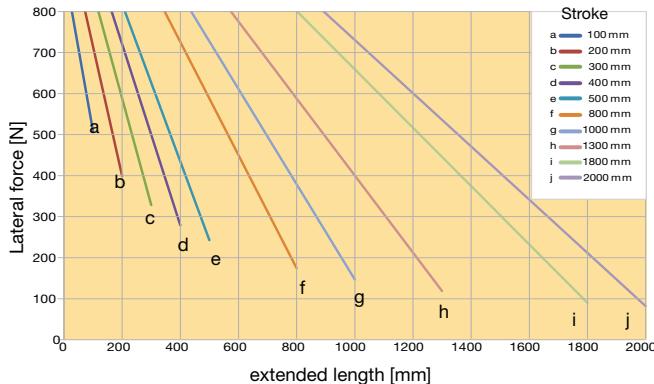

**ETH125**

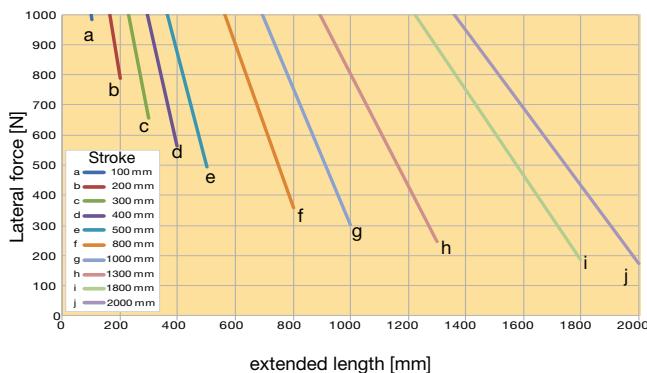


**Permissible lateral forces in horizontal mounting position**




1: Extended length  
2: Force application - at the middle of the cylinder rod thread


**ETH080**

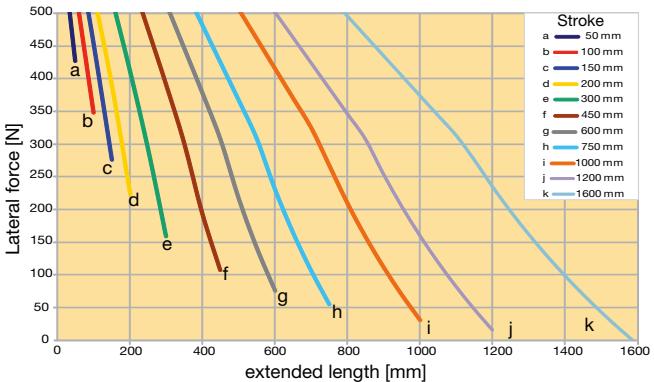

**ETH100**

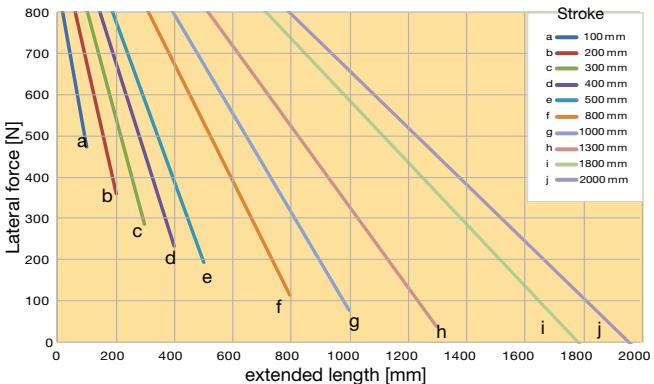

**ETH125**

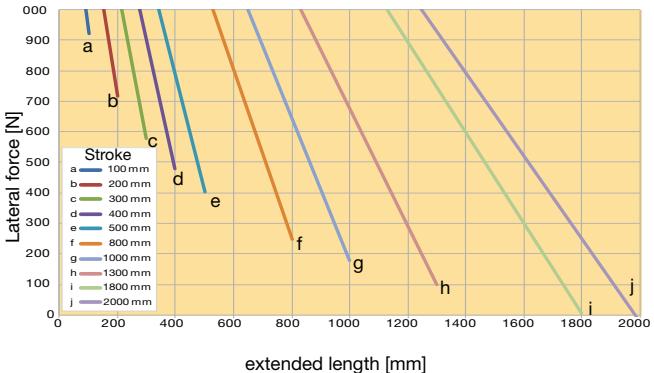

The diagrams apply for an ambient temperature of 20 °C, for all housing orientations and a medium travel speed of 0.5 m/s, (ETH032, ETH050, ETH080) or 0.25 m/s (ETH100, ETH125).


<sup>1)</sup> For ATEX cylinders, side loads are not permitted!

# Stroke, Usable Stroke and Safety Travel

## Calculation

### Stroke:

The stroke to be indicated in the order code is the mechanically maximal possible stroke between the internal end stops.

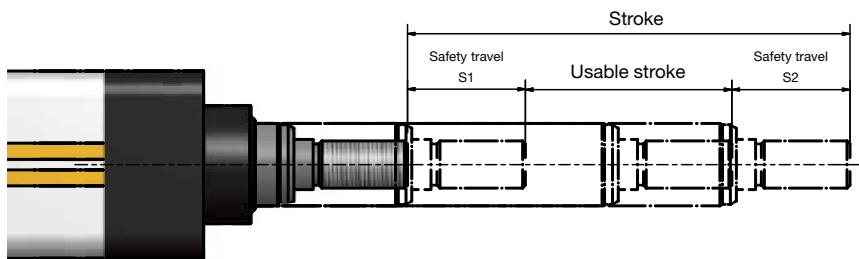

### Usable stroke:

The usable stroke is the distance which you need to move in your application. It is always shorter than the stroke.

### Safety travel (S1 & S2):


The safety travels are required to slow down the cylinder after it has passed a limit switch, Emergency stop in order to avoid contact with the mechanical limit stops.

Depending on the screw lead and the maximum speed, the following diagram recommends a minimum

safety travel, which is sufficient for most applications according to experience.

With demanding applications (great masses and high dynamic), the safety travel has to be calculated and enlarged accordingly (dimensioning on demand).


## Diagram

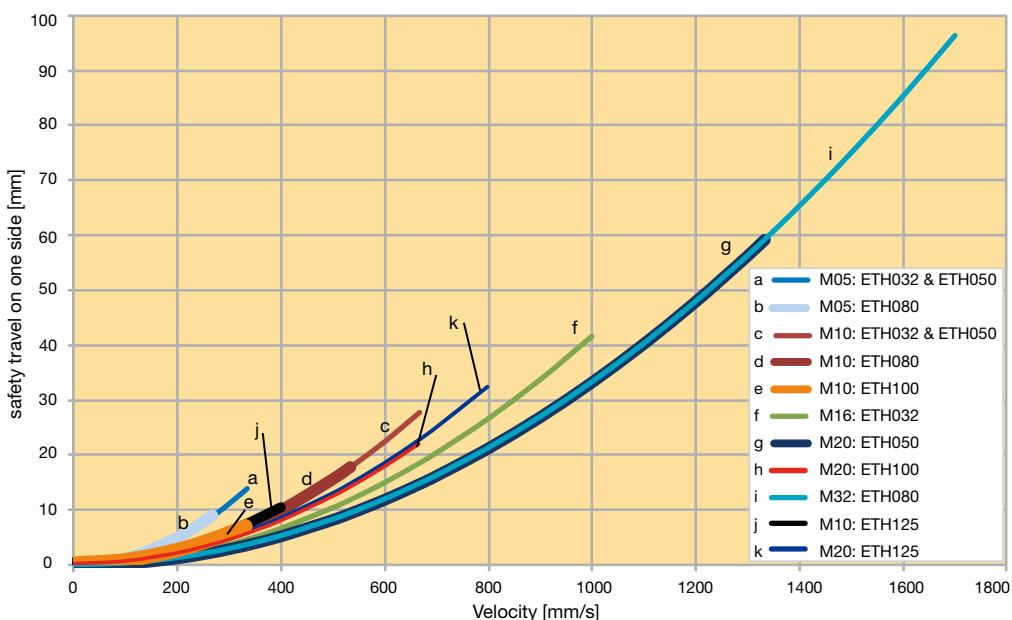

**Information:** The safety travel taken from the diagram applies for one side. I.e. the diagram value must be multiplied by factor 2 in order to get the total safety travel. The diagram is based on the maximum screw acceleration / deceleration

## Relubrication

All frame sizes include a standard Easy lubrication port for lubricating the screw nut (designation "1" in the order code page 54).

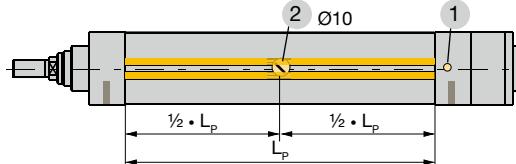


1: Central lubrication (standard)

2: Optional lubrication  
(possible on all 4 sides).


L<sub>p</sub>: Length of profile

### Option 1: Central lubrication (standard)

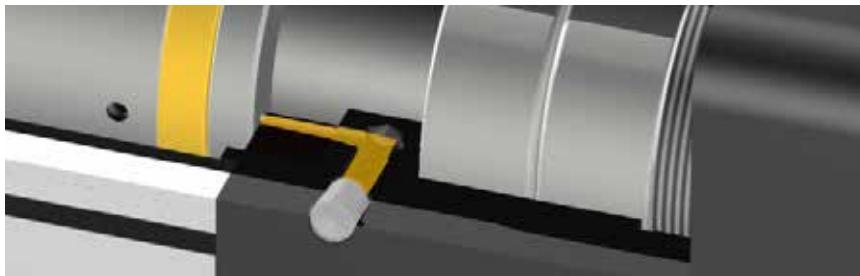

Relubrication is simple with the easy access port. Users simply perform a controlled retract of the cylinder approaching the end stop under slow speed and grease the cylinder. Central relubrification orientation is always envisaged in a 3 o'clock position.

### Option 2...5: Middle lubrication via an opening in the profile

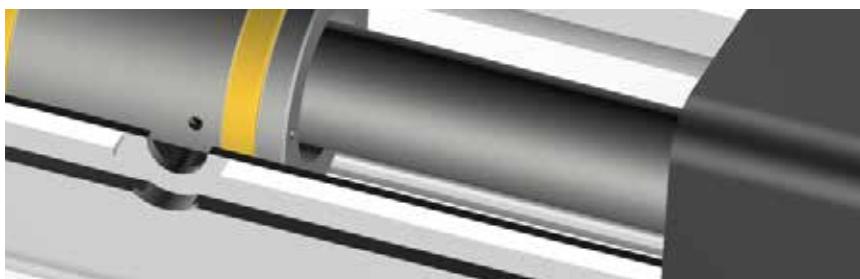

If a space constraint does not allow easy access to the standard lubrication port, other options in the part number configuration allow for a port at the center of the extrusion. Free access to this bore even after integration of the cylinder into a system can be ensured by choosing the corresponding profile orientation (see order code page 54). The bore is located exactly in the middle of the aluminum profile.




## Motor Mounting Options(P Series)


Dimensions [mm]

	Code	Motor / gearbox	Motor Dimensions				Motor mounting options				
			Pilot	Bolt circle	$\emptyset$ Shaft	Shaft length	Inline		Parallel		
							L1	L2	PD3	PD4	PD5
ETH032	AAM	PM-FBL 01/02/04	50	70	14	30	67	60	67.5	14	60
	AAV	PM-FCL 03/04	70	90	14	40	77	80	67.5	14	80
ETH050	AAM	PM-FBL 01/02/04	50	70	14	30	64	65	87.5	14	65
	AAV	PM-FCL 03/04	70	90	14	40	74	82	87.5	15	82
	AAN	PM-FCL 05/06/07/08/10	70	90	19	40	84	86	X X X		
	AAW	PM-FE 03M/05G/06D/P9A/11D/15A	110	145	19	58	102	130			
ETH080	AAN	PM-FCL 05/06/07/08/10	70	90	19	40	94.5	96	130	15	96
	AAW	PM-FE 03M/05G/06D/P9A/11D/15A	110	145	19	58	109.5	130	130	22	130
	AAX	PM-FE 09M/13G/16D/22A	110	145	22	58	112.5	130	130	22	130
	AAO	PM-FE 12M/17G/22D/30A	110	145	24	58	112.5	130	130	22	130

Inline

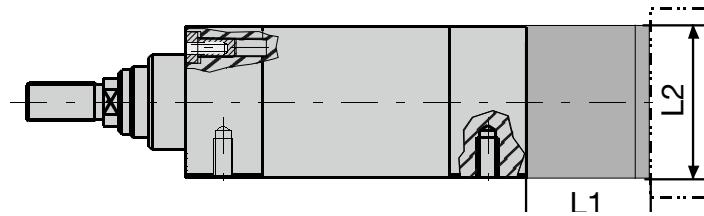

Parallel

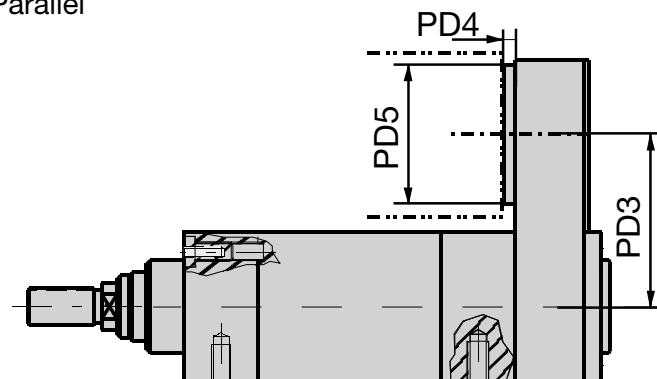

# Motor Mounting Options

Dimensions [mm]

		Code		Motor Dimensions				Motor Mounting Option		X	
ETH032	inline	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2	X
			AAA K1A	SMH60-B8/9	40	63	9	20	60.0	60.0	
			AAA K1A	MH56-B5/9	40	63	9	20			
			AAB K1B	SMH60-B5/11	60	75	11	23			
			AAB K1B	MH70-B5/11	60	75	11	23			
			AAB K1B	NX3, EX3	60	75	11	23			
			AAC K1C	SMH82-B8/14	80	100	14	30	67.0	82.0	
			BAA P1A	PS60	50	70	16	40	77.0	63.5	
			BAA P1J	PV3	40	52	14	35	72.0	63.5	
ETH050	parallel	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
			AAA K1A	SMH60-B8/9	40	63	9	20			9.0
			AAA K1A	MH56-B5/9	40	63	9	20			60.0
			AAB K1B	SMH60-B5/11	60	75	11	23			9.0
			AAB K1B	MH70-B5/11	60	75	11	23			70.0
			AAB K1B	NX3, EX3	60	75	11	23			
			AAC K1C	SMH82-B8/14	80	100	14	30			14.0
			AAE K1E	SMH82-B5/19	95	115	19	40			82.0
			AAE K1E	SMH100-B5/19	95	115	19	40	84	100	
			AAE K1E	MH105-B5/19	95	115	19	40	84	105	
ETH080	parallel	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
			AAB K1B	SMH60-B5/11	60	75	11	23			9
			AAB K1B	MH70-B5/11	60	75	11	23			70
			AAB K1B	NX3, EX3	60	75	11	23			9
			AAC K1C	SMH82-B8/14	80	100	14	30			82
			AAF K1F	SMH100-B5/14 <sup>1)</sup>	95	115	14	30			100
			AAF K1F	SMH100-B5/14 <sup>1)</sup>	95	115	14	30			13
			BAA P1A	PS60	50	70	16	40	74	63.5	
			BAJ P1J	PV3	40	52	14	35	69	63.5	
											16

<sup>1)</sup> Order Code SMH100-B5/14: " SMH100.....ETH..." (the motor shaft diameter is replaced by the term "ET")  
(not in the motors catalog) only with feedback: Resolver, A7

Motors always with key groove on the output shaft. Additional motor mounting options upon request.

See site for details:

Motors



[www.parker.com/eme/smh](http://www.parker.com/eme/smh)  
[www.parker.com/eme/mh](http://www.parker.com/eme/mh)  
[www.parker.com/eme/nx](http://www.parker.com/eme/nx)  
[www.parker.com/eme/ex](http://www.parker.com/eme/ex)  
[http://solutions.parker.com/AUG\\_EM](http://solutions.parker.com/AUG_EM)

Gearboxes

[www.parkermotion.com](http://www.parkermotion.com)

ETH - Electro Cylinder  
Motor Mounting Options

Dimensions [mm]

				Motor Dimensions				Motor mounting options			
				Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2		
ETH100	inline		Code	Motor / gearbox							
			K1H	SMH100-B5/24	95	115	24	50	155 140		
			K1H	MH105-B5/24	95	115	24	50	155 140		
			K1J	SMH115-B7/24, NX6, EX6	110	130	24	50	155 140		
			K1K	SMH142-B5/24	130	165	24	50	155 145		
			K1K	MH145-B5/24	130	165	24	50	155 145		
			K1L	MH205-B5/38	180	215	38	80	185 205		
			K1L	SMH170-B5/38	180	215	38	80	185 205		
			P1C	PS115	110	130	32	68	175 140		
			P1D	PS142	130	165	40	102	207 142		
			P1J	PV5	110	130	25	55	160 140		
ETH125	parallel		Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3 PD4 PD5		
			K1H	SMH100-B5/24	95	115	24	50	23 155		
			K1H	MH105-B5/24	95	115	24	50	23 155		
			K1J	SMH115-B7/24, NX6, EX6	110	130	24	50	23 155		
			K1K	SMH142-B5/24	130	165	24	50	22 155		
			K1K	MH145-B5/24	130	165	24	50	22 155		
			K1L	MH205-B5/38	180	215	38	80	27 205		
			K1L	SMH170-B5/38	180	215	38	80	27 205		
			P1C	PS115	110	130	32	68	38 155		
			P1D	PS142	130	165	40	102	45 155		
			P1J	PV5	110	130	25	55	23 155		
				Motor Dimensions				Motor mounting options			
				Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1 L2	
				K1L	SMH170	180	215	38	80	209.5 205	
				K1L	MH205	180	215	38	80	209.5 205	
				K1M	MH265	250	300	48	110	239.5 264	
				P1C	PS115	110	130	32	68	197.5 170	
				P1D	PS142	130	165	40	102	231.5 170	
				P1K	PV7	120	140	40	97	226.5 205	
					Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3 PD4 PD5
					K1L	SMH170	180	215	38	80	25 205
					K1L	MH205	180	215	38	80	25 205
					K1M	MH265	250	300	48	110	45 264
					P1C	PS115	110	130	32	68	32 185
					P1D	PS142	130	165	40	102	45 185
					P1K	PV7	120	140	40	97	42 205

Additional motor mounting options on request.

Details on the Internet:

**Motors**

[www.parker.com/eme/smh](http://www.parker.com/eme/smh)  
[www.parker.com/eme/mh](http://www.parker.com/eme/mh)  
[www.parker.com/eme/nx](http://www.parker.com/eme/nx)  
[www.parker.com/eme/ex](http://www.parker.com/eme/ex)  
[http://solutions.parker.com/AUG\\_EM](http://solutions.parker.com/AUG_EM)

**Gearboxes**

[www.parkermotion.com](http://www.parkermotion.com)

# Motor and Gearbox Selection

## Drive torque calculation

The torques to be produced by the motor result from the acceleration, the load and the friction torque. The drive torques must be calculated for all segments of the application cycle (represented by index "j")

Calculation of the **acceleration torque** with respect to the rotary moments of inertia:

$$M_{B,j} = \left( (J_{i/p,0} + J_{i/p, Stroke} \cdot \text{Stroke}) \cdot \frac{1}{\eta_{ETH}} \right) \cdot \frac{1}{i_G^2 \cdot \eta_G} + J_G + J_M \cdot 10^{-3} \cdot \frac{6.28 \cdot a_{K,j}}{P_h}$$

only with gearbox

Formula 5

The acceleration forces due to the translatory moved masses are taken into consideration in the calculation of the axial forces on (page 11).

The **load torques** result from the occurring axial forces:

$$M_{L,j} = \frac{F_{x,a/e,j}}{\text{Thrust force factor}} \cdot \frac{1}{i_G \cdot \eta_G}$$

only with gearbox

Formula 6

The motor must therefore generate the following drive torques:

$$M_{M,j} = M_{B,j} + M_{L,j}$$

Formula 7

The **effective torque** can be deduced from the drive torques for all segments of the application cycle (formula 7):

$$M_{eff} = \sqrt[2]{\frac{1}{t_{total}} \cdot (M_{M1}^2 \cdot t_1 + M_{M2}^2 \cdot t_2 + \dots)}$$

Formula 8

## Motor dimensioning

- The nominal torque of the motor must exceed the calculated effective torque (formula 8).
- The peak torque of the motor must exceed the maximum occurring drive torque (formula 7).

With the aid of the "motor mounting options" chart you can check if the respective motor is mechanically compatible to the corresponding electro cylinder.

### Abbreviations used (formula 5-8)

$M_{B,j}$	= Variable acceleration torque in Nm
$J_{i/p,0}$	= Red. rot. mass moment of inertia at zero stroke for inline/parallel motor configuration in kgmm <sup>2</sup> see "Technical Data" page 8
$J_{i/p, Stroke}$	= Red. rot. mass moment of inertia per mm of stroke for inline/parallel motor configuration in kgmm <sup>2</sup> see "Technical Data" page 8
Stroke	= Selected stroke in mm
$\eta_{ETH}$	= Efficiency of the electro cylinder                    0.9 (inline drive configuration) 0.81 (parallel motor)
$i_G$	= Gearbox ratio
$\eta_G$	= Efficiency of the gearbox (see gearbox manufacturer specifications)
$J_M$	= Motor mass moment of inertia in kgmm <sup>2</sup> (see motor manufacturer specifications)
$J_G$	= Gearbox mass moment of inertia in kgmm <sup>2</sup> (see gearbox manufacturer specifications)
$a_{K,j}$	= Acceleration at the cylinder rod in m/s <sup>2</sup>
$P_h$	= Screw pitch in mm
$M_{L,j}$	= Load torque in Nm
$F_{x,a/e,j}$	= Loads in x direction in N (see page 11)
$M_{M,j}$	= Drive torque in Nm
$M_{eff}$	= Effective value - motor in Nm
$t_{total}$	= Total cycle time in s
$t_j$	= Amount of time in the cycle in s


Force constant: "Technical Characteristics" see page 8.

Index "j" for the individual segments of the application cycle

## Mounting Methods

Please respect the notes in the ETH Manual (19x-550002) on the permissible screws and tightening torques.

### Standard




**ETH032-ETH125**

Example for parallel motor configuration




Mounting via thread on the cylinder front or end side with parallel motor configuration (ETH032-ETH125).  
("Dimensions" see page 21)

**ETH032-ETH080**

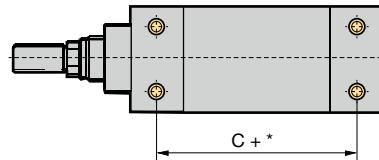

Mounting with 4 mounting threads on the underside of the profile.  
(ETH032-ETH080).  
("Dimensions" see page 21)

### Center Trunnion Mounting

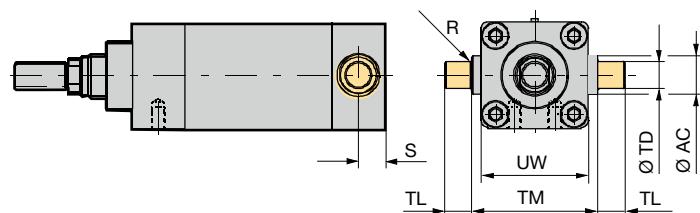


	<b>UW</b>	<b>ØTD (h8)</b>	<b>R</b>	<b>TL</b>	<b>TM</b>	<b>ØAC</b>	<b>S</b>
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	46.5	12	1	12	50	18	25.5
<b>ETH050</b>	63.5	16	1	16	75	25	39
<b>ETH080</b>	95.3	25	2	25	110	35	34.5
<b>ETH100</b>	120	40	4	40	140	70	57
<b>ETH125</b>	150	50	10	52	160	90	100

+\* = Measure + Length of desired stroke ("Dimensions" see page 21).

Note: For relubrication option "1" (central lubrication port) please see mounting method with option "D" center trunnion always on 6 o'clock!

## Rear Eye Mounting

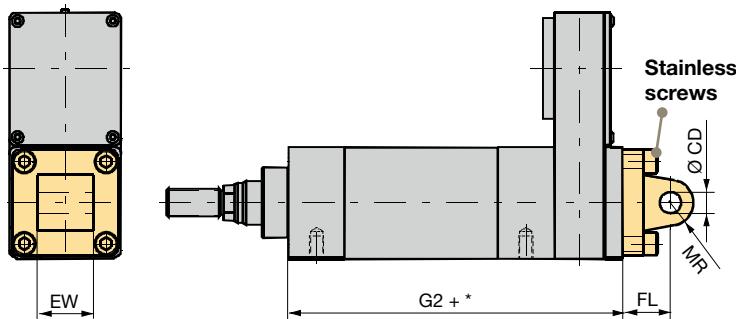


	Order no.	EW	ØCD	MR	FL $\pm 0.2$
		[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0112.033	26	10 <sup>+0.058</sup> <sub>-0.010</sub>	11	22
<b>ETH050</b>	0122.033	32	12 <sup>+0.058</sup> <sub>-0.010</sub>	13	27
<b>ETH080</b>	0132.033	50	16 <sup>+0.058</sup> <sub>-0.010</sub>	17	36
<b>ETH100</b>	0142.033	60	30 <sup>+0.085</sup> <sub>-0.010</sub>	35	80
<b>ETH125</b>	0152.033	70	50 <sup>+0.110</sup> <sub>-0.010</sub>	45	115

$^*$  = Measure + Length of desired stroke ("Dimensions" see page 21).  
Listed in the order code of the cylinder; the order number applies only for ordering spare parts.  
Spare parts delivery is including screws for cylinder mounting.


## Rear Clevis



**ETH032-ETH080**

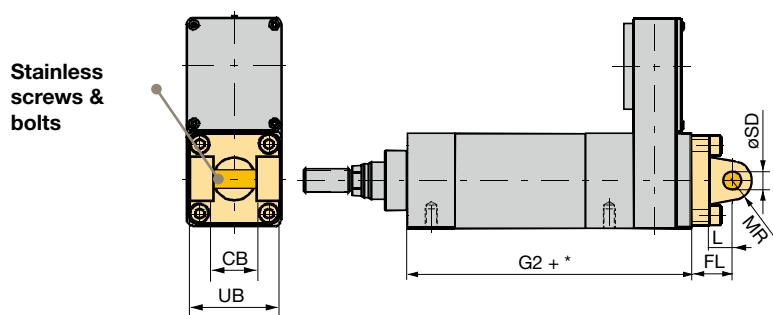

**ETH100 & ETH125**

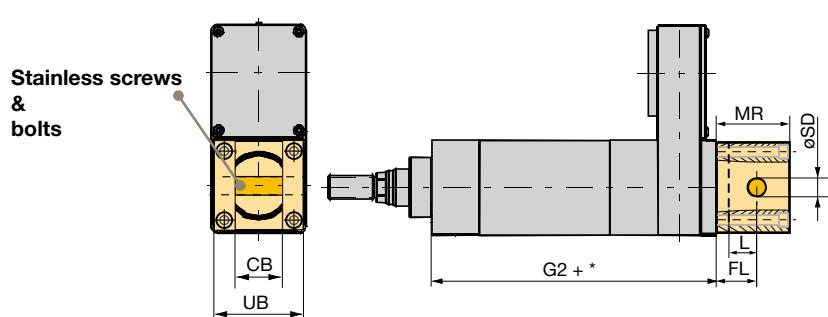

	Order no.	UB	CB	ØSD	MR	L	FL $\pm 0.2$
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0112.031	46.5	26	10 h9	9.5	13	22
<b>ETH050</b>	0122.031	63.5	32	12 h9	12.5	16	27
<b>ETH080</b>	0132.031	95	50	16 h9	17.5	22	36
<b>ETH100</b>	0142.031	120	60.5	30 f7	100	40	65
<b>ETH125</b>	0152.031	150	70.5	50 f7	145	55	90


$^*$  = Measure + length of desired stroke ("Dimensions" see page 21).  
Listed in the order code of the cylinder; the order number applies only for ordering spare parts.  
Spare parts delivery is including screws for cylinder mounting.

## Bearing Block


Counter piece of rear clevis. Please order separately with order no., if required

Dimensions [mm]


**Bearing block for ETH032, Part No. 0112.039**

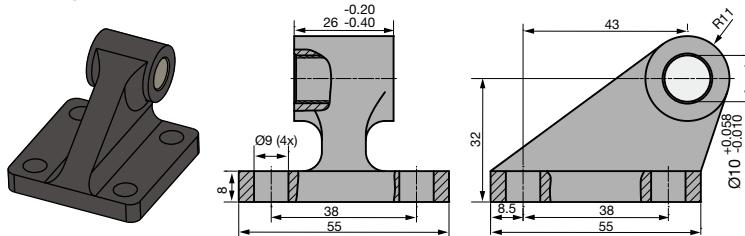


**Bearing block for ETH050, Part No. 0122.039**

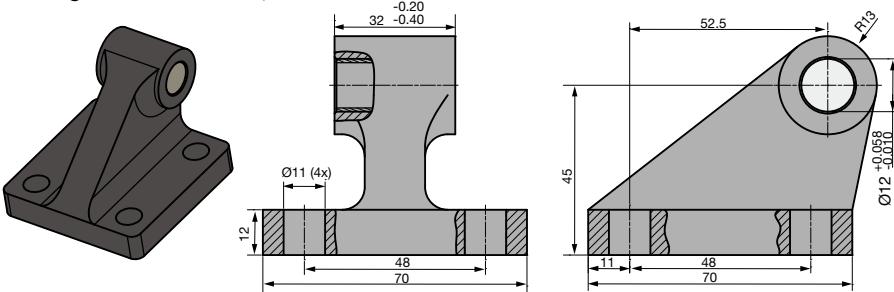


**Bearing block for ETH080, Part No. 0132.039**

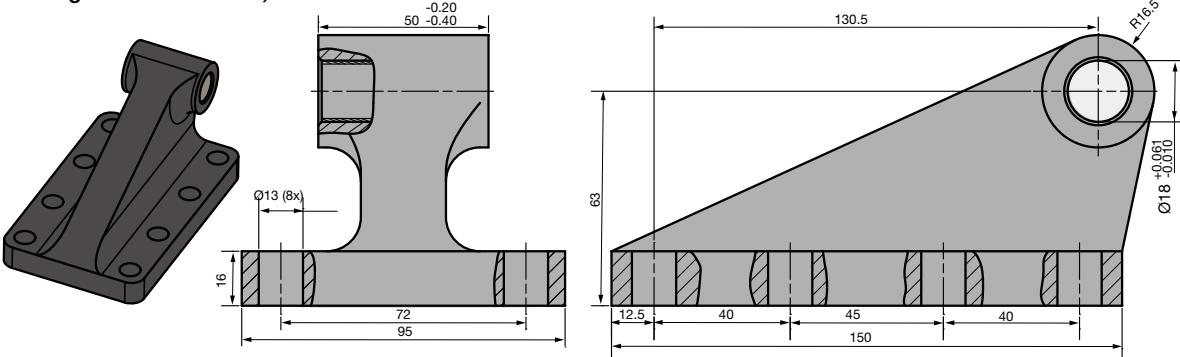


**Bearing block for ETH100, Part No. 0142.039**

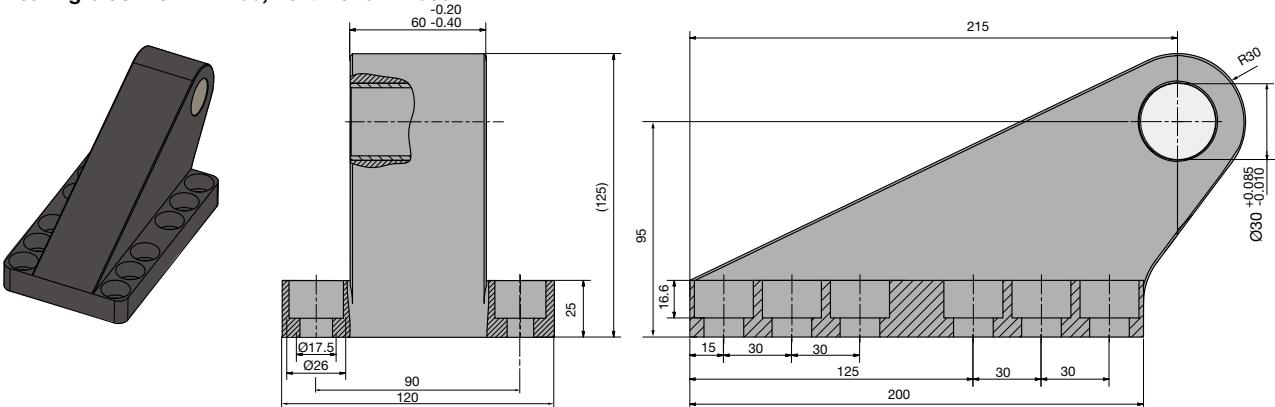


**Bearing block for ETH125, Part No. 0152.039**

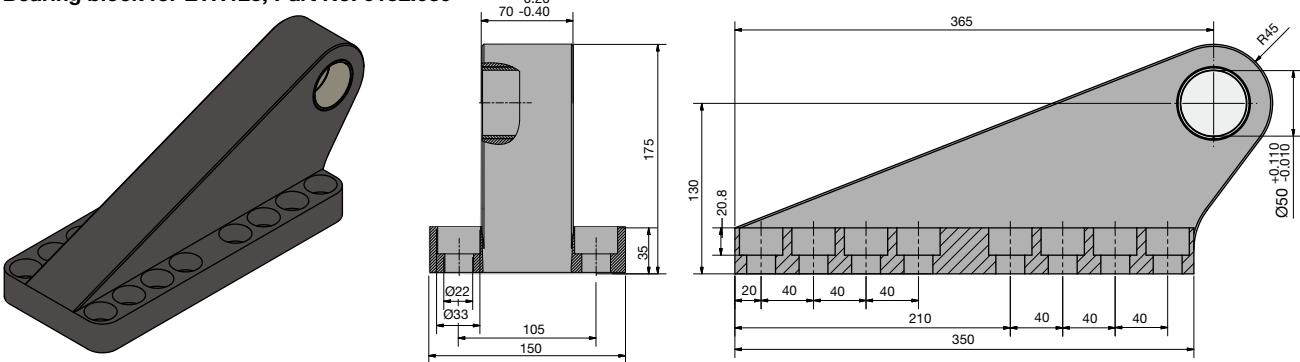


## Rear Plate

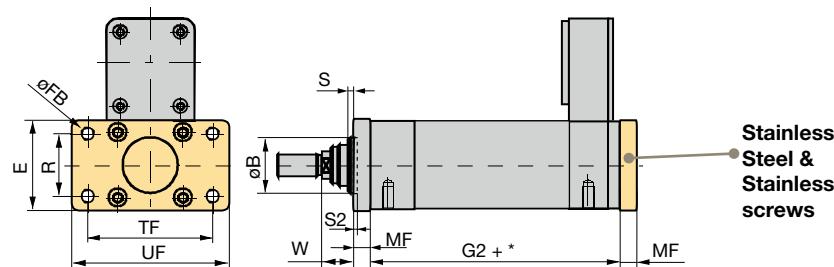

## Front Plate

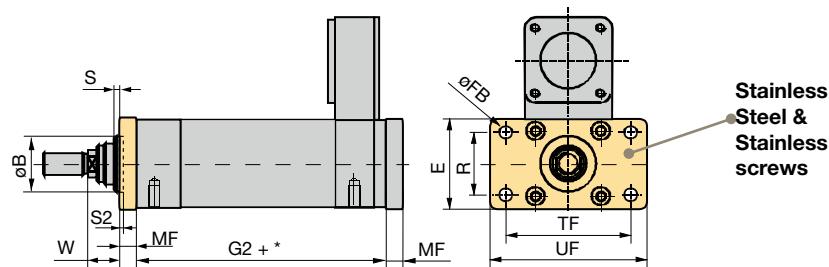

## Front and Rear Plate

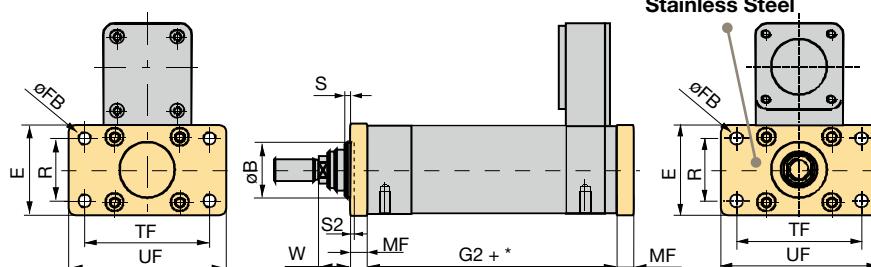

## End plate (H) and front plate (J) dimensions

	Order no. (1 piece)	UF	E	TF	ØFB	R	W	MF	ØB Rear Plate	ØB Front plate	S	S2
		[mm]	[mm]	[mm]	[mm]							
<b>ETH032</b>	0112.918	80	48	64	7	32	16	10	30	30	2	-
<b>ETH050</b>	0122.918	110	65	90	9	45	25	12	40	40	4	-
<b>ETH080</b>	0132.918 (Rear Plate) 0132.919 (Front plate)	150	95	126	12	63	30	16	45	60	4	-
<b>ETH100</b>	0142.918	258	120	220	17.5	80	26	25	90	90	-	5
<b>ETH125</b>	0152.918	320	150	270	21.5	100	13	40	110	110	-	20

+\* = Measure + Length of desired stroke ("Dimensions" see page 21).


Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

Please note that front and rear plate as spare parts must be ordered separately.

Spare parts delivery is including screws for cylinder mounting.



Stainless components only available for ETH032-ETH100.

## Foot Mounting

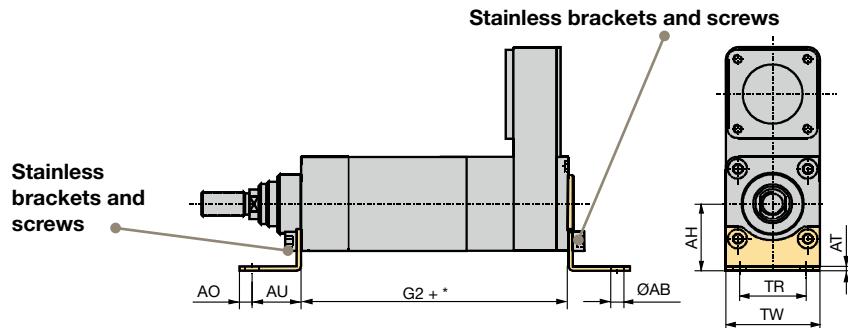

	Order no. Front & Terminal bracket	AH	AT	TR	ØAB (H14)	AO	AU	TW
[mm]								
<b>ETH032</b>	0112.916	32	4	32	7	8	24	46.5
<b>ETH050</b>	0122.916	45	4	45	9	12	32	63.5
<b>ETH080</b>	0132.916	63	6	63	13.5	15	41	95

## ETH100 & ETH125

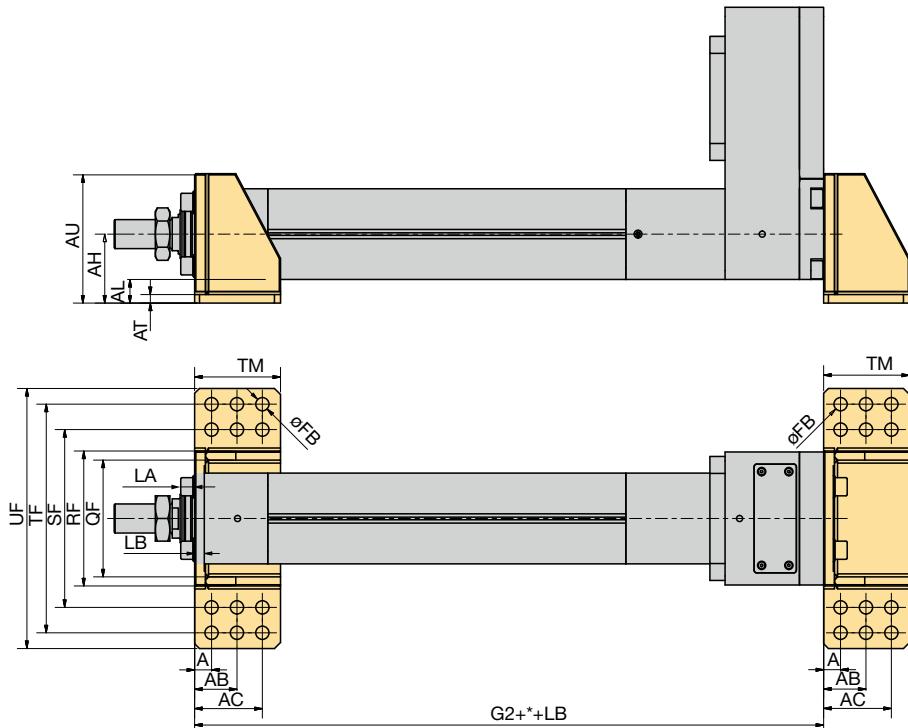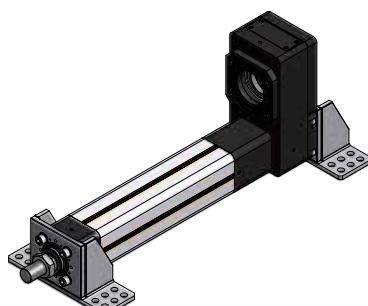

	Order no. Front & Terminal bracket	AU	AH	AL	AT	UF	TF	SF	RF	QF	LA	LB	ØFB	TM	A	AB	AC
[mm]																	
<b>ETH100</b>	0142.916	164	94	34	14	290	-	246	200	170	19	13	17.5	99	16.5	49.5	81.5
<b>ETH125</b>	0152.916	214	114	39	14	430	378	294	223	193	23	16	22	142	28	70	112

+\* = Measure + Length of desired stroke ("Dimensions" see page 21).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Spare parts delivery is including screws for cylinder mounting.

Spare components only available for ETH032-ETH080.


\* For protection classes "B" and "C", we recommend GEOMET® coated screws (thin layer corrosion protection).

## Mounting Flanges





**ETH032-ETH080**

Mounting Flanges

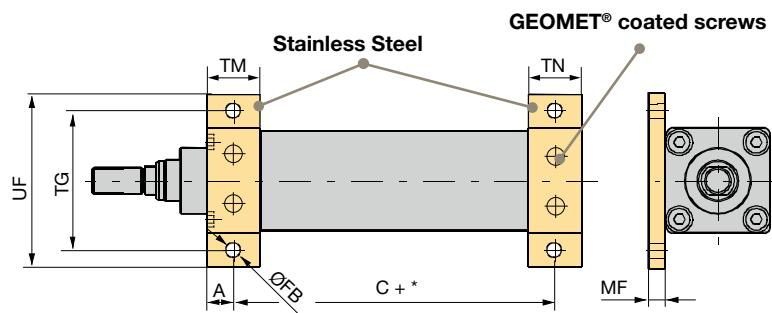

	Order no. (2 pieces)	TG	UF	ØFB	TM	MF	A	AB	TN	B	BB	BC
[mm]												
<b>ETH032</b>	0112.917	62	78	6.6	25	8	12.5	-	25	-	-	-
<b>ETH050</b>	0122.917	84	104	9	30	10	15	-	30	-	-	-
<b>ETH080</b>	0132.917	120	144	13.5	40	12	20	-	40	-	-	-

## ETH100 & ETH125

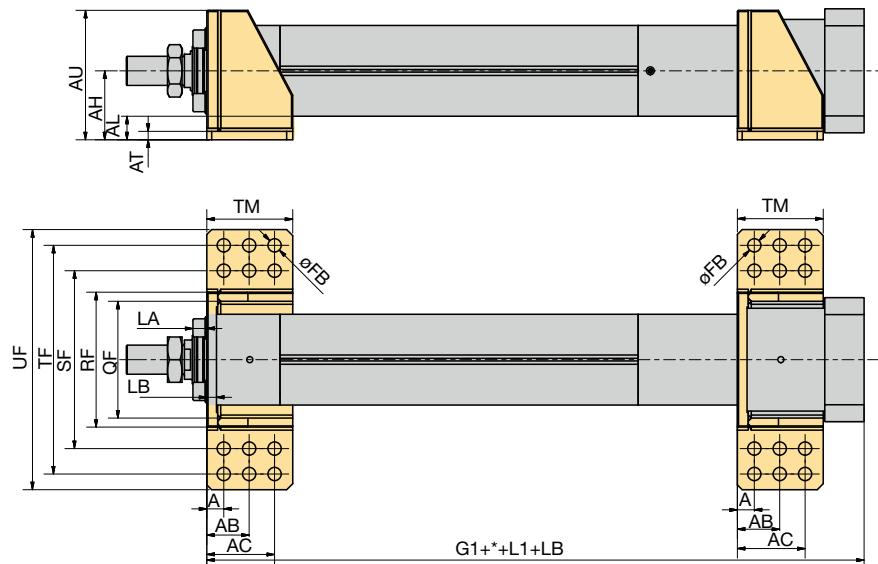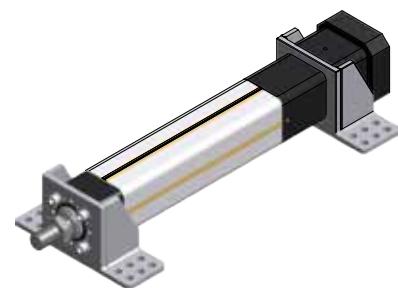

	Order no.	AU	AH	AL	AT	UF	TF	SF	RF	QF	LA	LB	ØFB	TM	A	AB	AC
[mm]																	
<b>ETH100</b>	- <sup>1)</sup>	164	94	34	14	290	-	246	200	170	19	13	17.5	99	16.5	49.5	81.5
<b>ETH125</b>	- <sup>1)</sup>	214	114	39	14	430	378	294	223	193	23	16	22	142	28	70	112

+\* = Measure + Length of desired stroke ("Dimensions" see page 21).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts (of ETH032-ETH080 only). Spare parts delivery is including screws for cylinder mounting.


Stainless components only available for ETH032-ETH080.

<sup>1)</sup> Subsequent conversion can only be made in our factory.

\* For protection classes "B" and "C", we recommend GEOMET® coated screws (thin layer corrosion protection).

## Cylinder Rod Version

### External thread


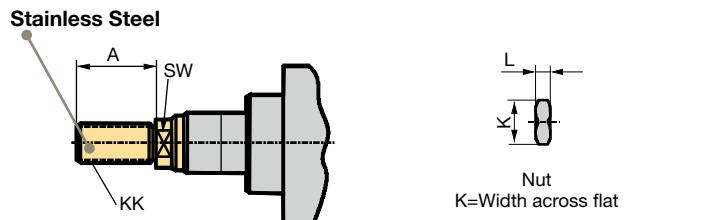


External Thread (upon delivery)				
	Weight	A	KK	SW <sup>1)</sup>
	[kg]	[mm]	[mm]	[mm]
<b>ETH032</b>	0.06	22	M10x1.25	10
<b>ETH050</b>	0.15	32	M16x1.5	17
<b>ETH080</b>	0.48	40	M20x1.5	22
<b>ETH100</b>	2.4	70	M42x2	46
<b>ETH125</b>	3.7	96	M48x2	55

Nut				
	Weight	M	L	K <sup>1)</sup>
	[kg]	[mm]	[mm]	[mm]
<b>ETH032</b>	0.01	M10x1.5	5	17
<b>ETH050</b>	0.02	M16x1.5	8	24
<b>ETH080</b>	0.04	M20x1.5	10	30
<b>ETH100</b>	0.27	M42x2	16	65
<b>ETH125</b>	0.60	M48x2	24	75

<sup>1)</sup> SW: Width across flat (position of the flat is not fixed)



### Internal Thread

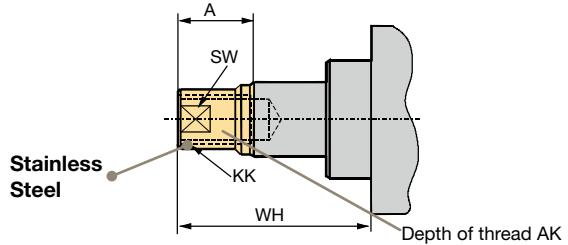

Internal Thread							
	Weight	A	KK (Option F)	KK (Option K)	AK	WH	SW <sup>1)</sup>
	[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	0.04	14	M10x1.25		20	32	12
<b>ETH050</b>	0.14	24	M16x1.5		25	50	20
<b>ETH080</b>	0.42	29	M20x1.5		35	59	26
<b>ETH100</b>	2.2	60	M42x2	M45x3	50	92	60
<b>ETH125</b>	4.3	90	M48x2	M45x3	60	123	70

<sup>1)</sup> SW: Width across flat (position of the flat is not fixed)


### Rod Clevis

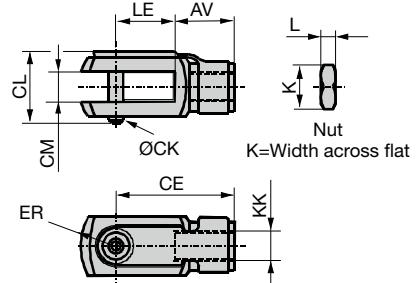

	Order no.		Weight	KK	CL	CM		LE	CE	AV	ER	ØCK (h11/E9)	K	L
	Standard	Stainless				[kg]	[mm]							
<b>ETH032</b>	4309	P1S-4JRD	0.09	M10x1.25	26.0	10.2	+0.13 -0.05	20	40	20	14	10	17	5
<b>ETH050</b>	4312	P1S-4MRD	0.34	M16x1.5	39.0	16.2	+0.13 -0.05	32	64	32	22	16	24	8
<b>ETH080</b>	4314	P1S-4PRD	0.69	M20x1.5	52.5	20.1	+0.02 -0.0	40	80	40	30	20	30	10

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread. Available for ETH032-ETH080.

## Spherical Rod Eye

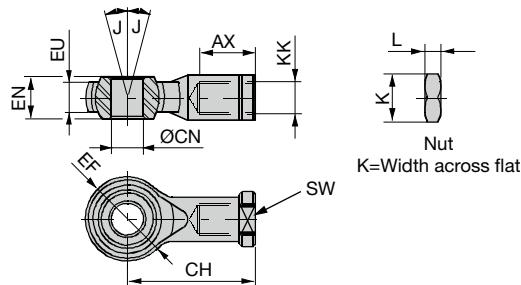

	Order no.		Weight	KK	SW <sup>1)</sup>	ØCN	EN	EU	AX	CH	ØEF	J	K	L
	Standard	Stainless												
			[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	4078-10	P1S-4JRT	0.07	M10x1.25	17	10 H9	14	10.5	20	43	28	13	17	5
<b>ETH050</b>	4078-16	P1S-4MRT	0.23	M16x1.5	22	16 H9	21	15.0	28	64	42	15	24	8
<b>ETH080</b>	4078-20	P1S-4PRT	0.41	M20x1.5	32	20 H9	25	18.0	33	77	50	14	30	10
<b>ETH100</b>	0142.920-01	0142.920-02	2.8	M42x2	60	40 H7	49	7	60	142	90	16	65	15
<b>ETH125</b>	0152.920-01	not available	5.0	M48x2	65	50 H7	60	45	65	160	116	14	75	24

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread.


<sup>1)</sup> SW: Width across flat (position of the flat is not fixed)

## Alignment Coupler



### For mounting at the extremity of the cylinder rod

- Balances misalignments
- Enlarges the mounting tolerance
- Simplifies the cylinder mounting
- Increases the service life of the cylinder guidings
- Compensates the offset between components and relieves the guiding from lateral force influences
- The traction/thrust force bearing capacity remains

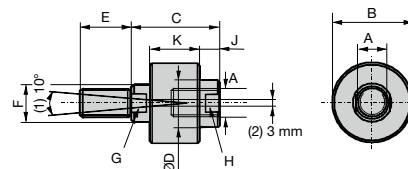

(1): Angle offset  
(2): Axial offset  
E: Hole dimension for depth


	Part No.	Weight	A	B	C	ØD	E	F	G	H	J	K
		[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
<b>ETH032</b>	LC32-1010	0.26	M10x1.25	40	51	19	19	16	13	16	13	26
<b>ETH050</b>	LC50-1616	0.64	M16x1.5	54	59	32	29	25	22	29	14	33
<b>ETH080</b>	LC80-2020	1.30	M20x1.5	54	59	32	29	25	22	29	14	33
<b>ETH100</b>	- <sup>1)</sup>	4.5	M39x2 <sup>2)</sup>	101.6	111.1	57.2	57.2	44.5	38	49	22.2	69.9
<b>ETH125</b>	0152.921	9.0	M48x2	127	142.9	76.2	76.2	57.2	49.3	67	35	85.8

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread. Only available in protection option A (IP54 with galvanized screws).

<sup>1)</sup> Subsequent conversion from rod end can only be made in our factory.

<sup>2)</sup> Attention: Thread M39x2 differs from the standard (M42x2).

## Outrigger Bearing

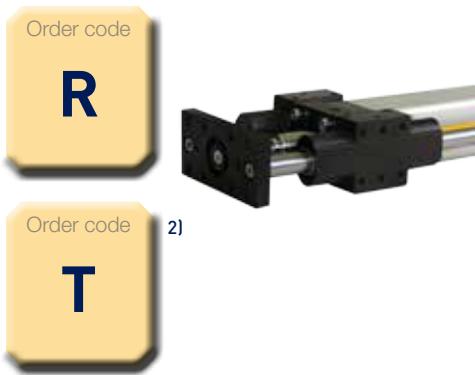

### Function of outrigger bearing:

- Additional stability and precision
- Anti-rotation device for higher torques
- Absorption of lateral forces

### Versions

#### Option R:

##### Outrigger bearing with ball bushings

(available only in protection class option A, "Order Code" see page 54)

- Main casting extruded aluminum
- 2 hardened steel guiding rods, surface hard-chrome plated
- Linear ball bearings

#### Option T:<sup>2)</sup>

##### Outrigger bearing with slide bushings

(for all protection options, standard with options B & C, "Order Code" see page 54)

- Main casting extruded aluminum
- 2 guiding rods stainless steel
- Sliding guides

When sizing the drive train of an ETH electro cylinder with outrigger bearing and sliding bushings, increased friction losses in the sliding bushings must be taken into consideration


#### Note:

<sup>1)</sup> xxxx corresponds to the customized stroke. For information about this value please contact Parker.

<sup>2)\*</sup> = Measure + Length of desired stroke ("Dimensions" see page 21).

available for ETH032-ETH080.  
For the ETH080, the standard pneumatic outrigger bearing modules cannot be used.

<sup>2)</sup> not for ATEX

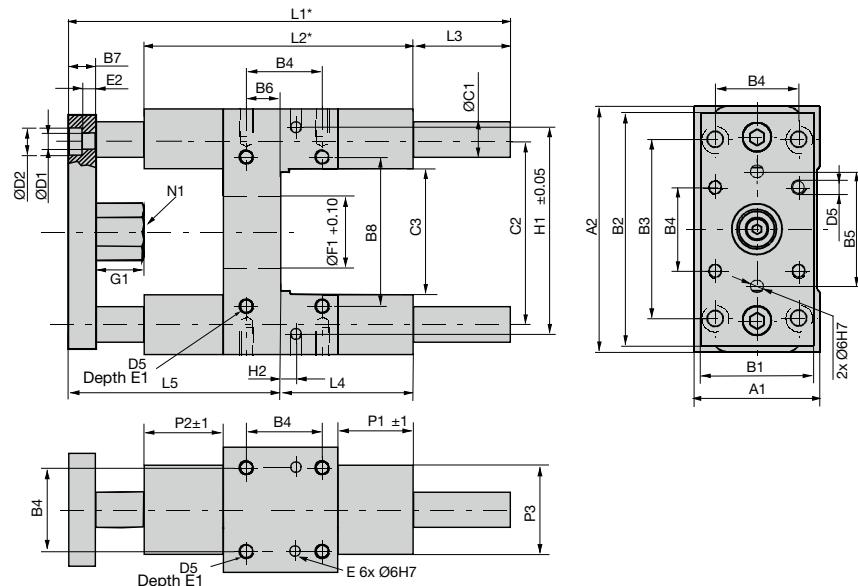


	Unit	ETH032	ETH050	ETH080
<b>Part-No. - Option R<sup>1)</sup></b>		0112.040-xxxx	0122.040-xxxx	0132.040-xxxx
<b>Part.-No. - Option T<sup>1)</sup></b>		0112.041-xxxx	0122.041-xxxx	0132.041-xxxx
<b>A1</b>	[mm]	50	70	105
<b>A2</b>	[mm]	97	137	189
<b>B1</b>	[mm]	45	63	100
<b>B2</b>	[mm]	90	130	180
<b>B3</b>	[mm]	78	100	130
<b>B4</b>	[mm]	32.5	46.5	72
<b>B5</b>	[mm]	50	72	106
<b>B6</b>	[mm]	4	19	21
<b>B7</b>	[mm]	12	15	20
<b>B8</b>	[mm]	61	85	130
<b>ØC1</b>	[mm]	12	20	25
<b>C2</b>	[mm]	73.5	103.5	147
<b>C3</b>	[mm]	50	70	105
<b>ØD1</b>	[mm]	6.6	9	11
<b>ØD2</b>	[mm]	11	14	17
<b>D5</b>	[mm]	M6	M8	M10
<b>E (Depth)</b>	[mm]	10	10	10
<b>E1 (Depth)</b>	[mm]	12	16	20
<b>E2 (Depth)</b>	[mm]	7	9	11
<b>ØF1</b>	[mm]	30	40	60
<b>G1</b>	[mm]	17	27	32
<b>H1</b>	[mm]	81	119	166
<b>H2</b>	[mm]	11.7	4.2	15
<b>L1+*</b>	[mm]	150	192	247
<b>L2</b>	[mm]	120	150	200
<b>L3+*</b>	[mm]	15	24	24
<b>L4</b>	[mm]	71	79	113
<b>L5</b>	[mm]	64	89	110
<b>N1</b>	[mm]	17	24	30
<b>P1</b>	[mm]	36	42	50
<b>P2</b>	[mm]	31	44	52
<b>P3</b>	[mm]	40	50	70
<b>Total mass with zero stroke</b>	[kg]	0.97	2.56	6.53
<b>Moving mass zero stroke</b>	[kg]	0.60	1.84	4.36
<b>Additional mass</b>	[kg/m]	1.78	4.93	7.71


## Permitted load / lifetime / deformation of the parallel guiding

### Outrigger bearing with ball bushings (Option R)

#### ETH032

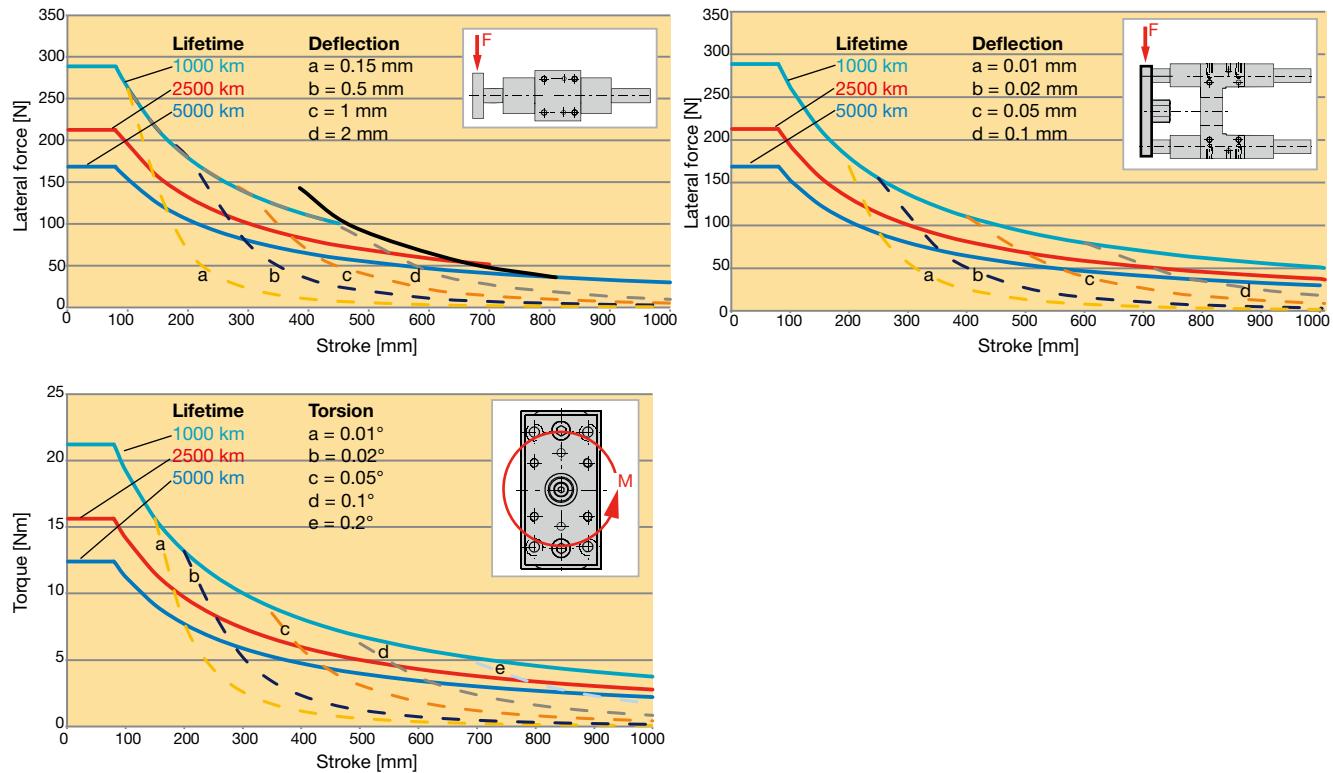




#### ETH050

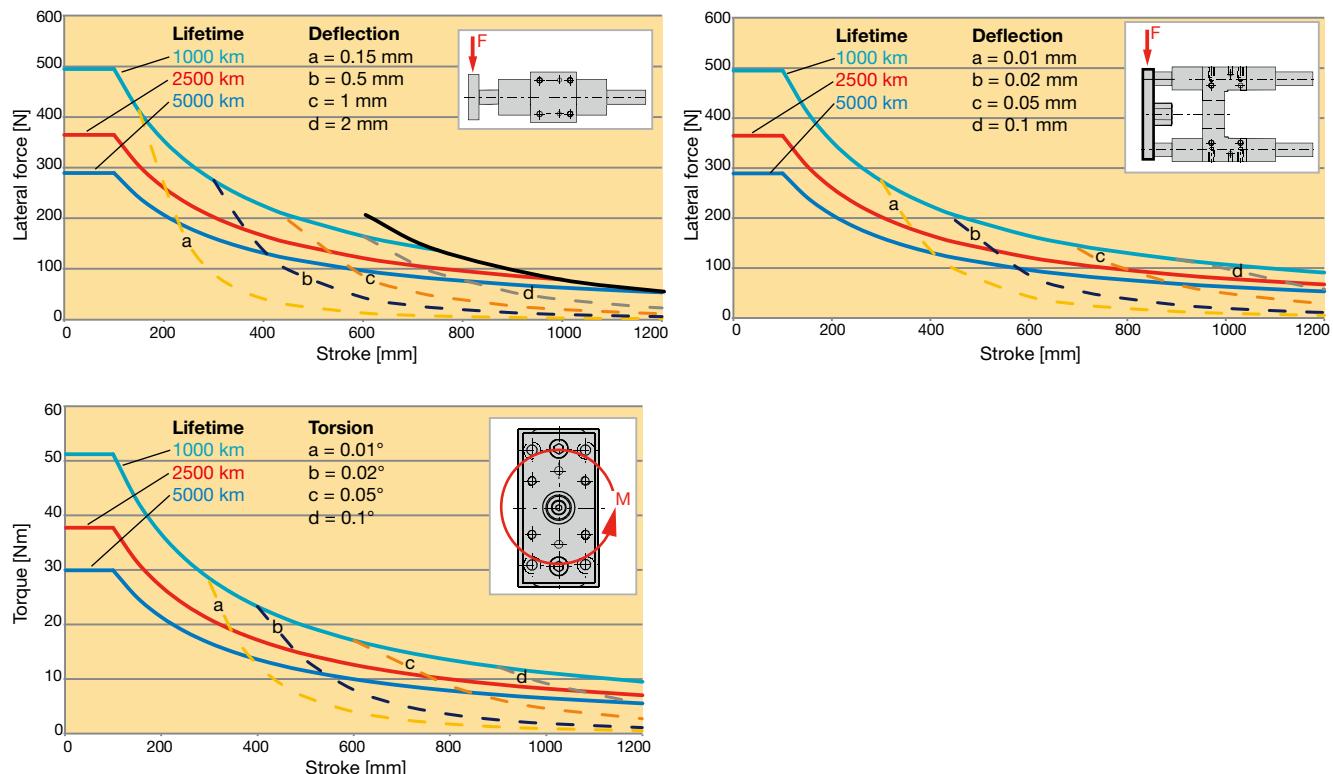

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.




### Outrigger bearing with ball bushings (Option R)

#### ETH080

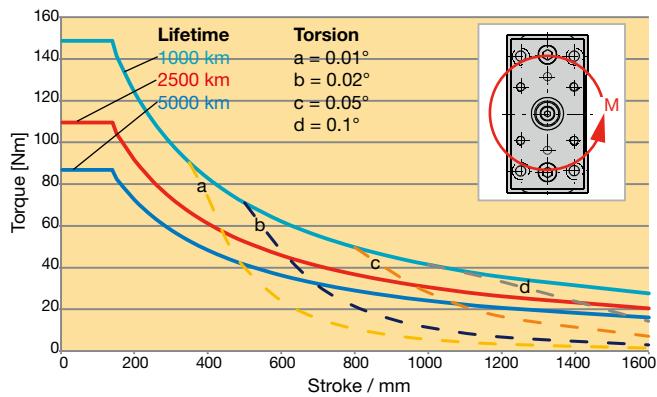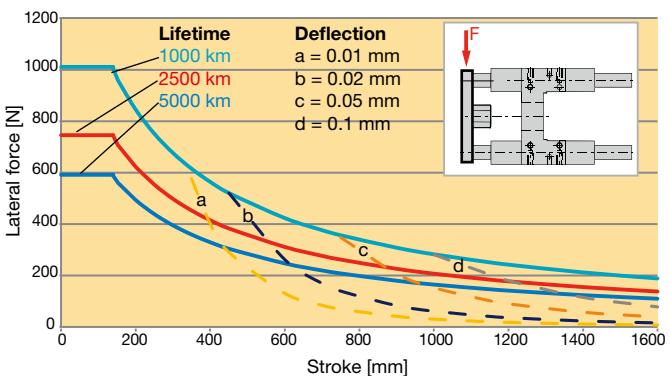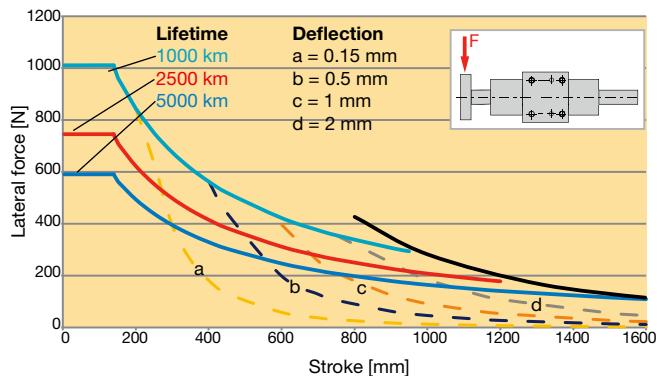

### Outrigger Bearing with sliding guide (option T)




#### ETH032

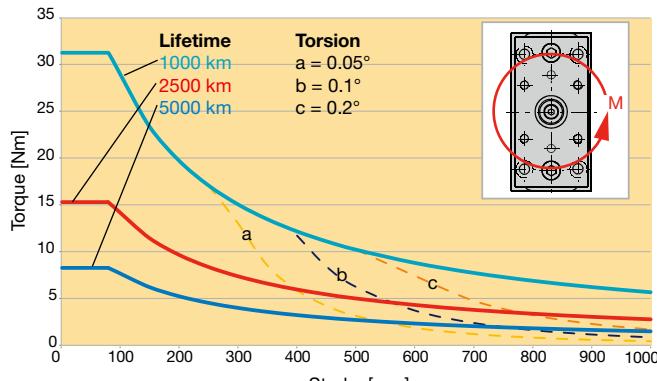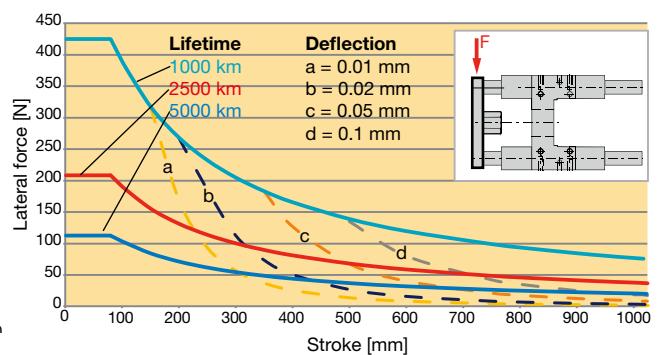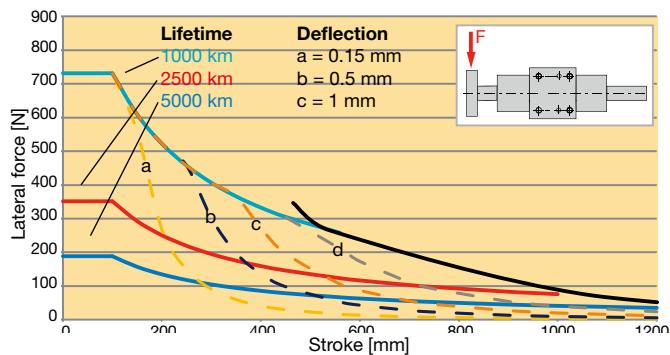




The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.

## Outrigger Bearing with sliding guide (option T)

### ETH050

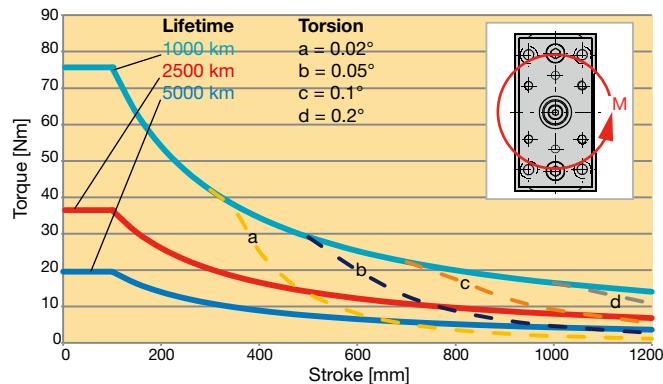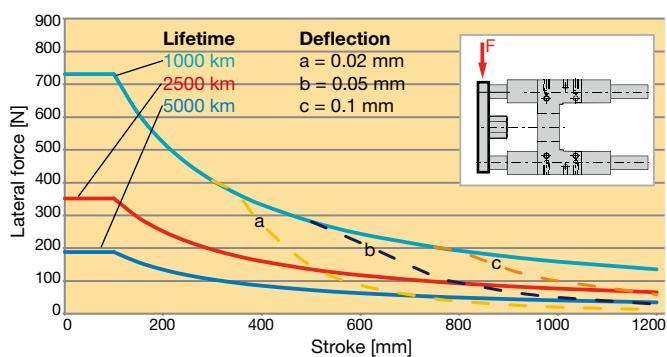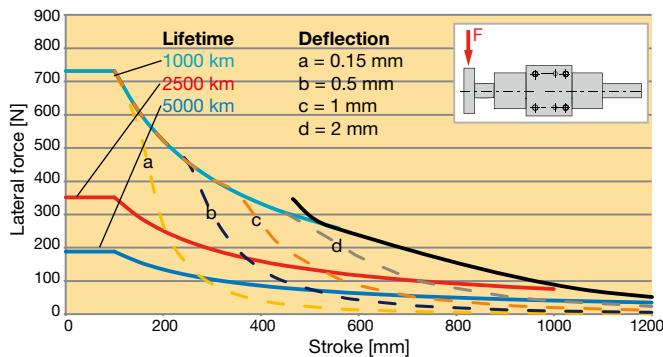

### ETH080

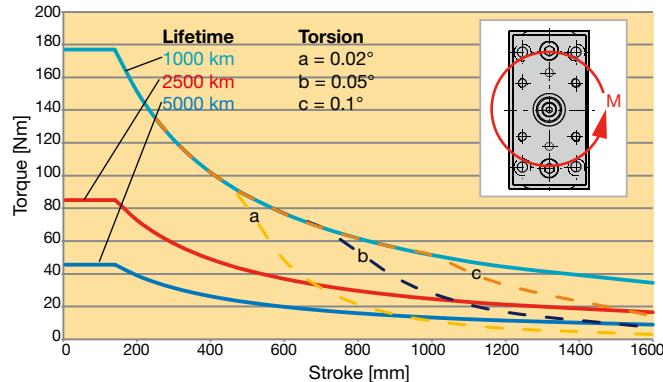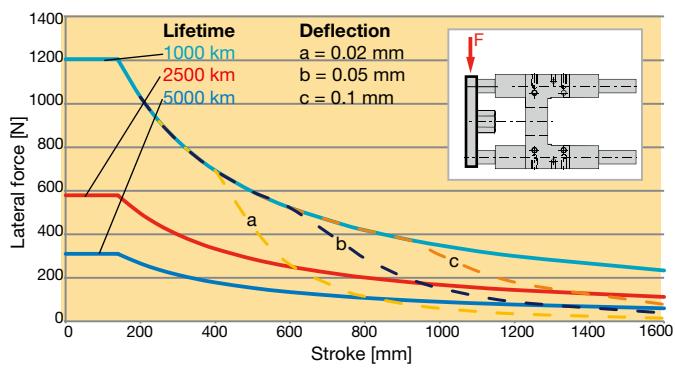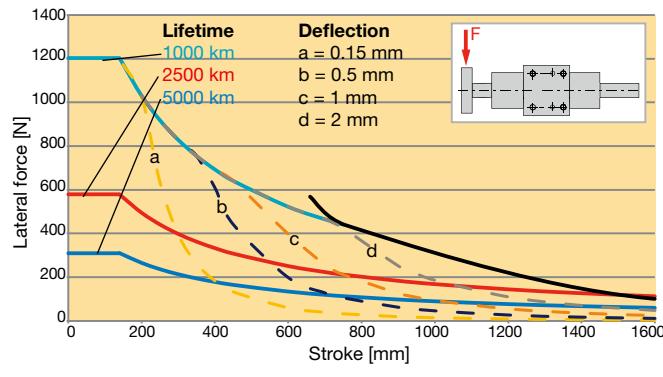

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.

## Accessories

### <sup>1)</sup> Force sensors - Joint head with integrated force sensor with optional joint head

Swivel heads are important construction components with respect to rotary, pivoting and tilting movements. Force measurements are more and more frequently required in those applications.

The force transducers are suitable for direct mounting on the cylinder rod. They can, for example, be used to measure contact forces or overloads. Thanks to the thin film technology, the swivel head force transducers are very robust and long time stable. An integrated amplifier emits an output signal of 4...20 mA.

The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC) and are sized to pick up traction/thrust forces.



#### Features

- Measuring range:  
Traction/thrust forces up to  $\pm 114$  kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- High long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting

Connection of the force sensors to Compax3 with Option M21 is possible.

#### Technical Features

Unit		Joint head with integrated force sensor									With External Thread		
		ETH032			ETH050			ETH080			ETH100	ETH125	
		M05	M10	M16	M05	M10	M20	M05	M10	M32	M10/M20	M10	M20
Accuracy	[%]	0.2									1		
Material	-	Stainless steel									Stainless steel		
Protection class	-	IP67									IP67		
Measuring range	[kN]	$\pm 3.7$	$\pm 3.7$	$\pm 2.4$	$\pm 9.3$	$\pm 7.0$	$\pm 4.4$	$\pm 17.8$	$\pm 25.1$	$\pm 10.6$	$\pm 56.0$	$\pm 88.7$	$\pm 114.0$
Accuracy	[N]	14.8	14.8	9.6	37.2	28.0	17.6	71.2	100.4	42.4	1120	1774	2280
Part No.	-	0111.916		0111.917	0121.916	0121.917	0121.918	0131.916	0131.917	0131.918	0141.916	0141.917	0141.918

For ETH032-ETH080: Only possible with cylinder rod end "M" (external thread).



For ETH100, ETH125: Only possible with cylinder rod end "K".

A subsequent conversion from another rod end to M or K is generally **NOT** possible.

#### Electrical connection

Power supply UB = 10...30 VDC

Analog output 4...20 mA (two-wire technology)

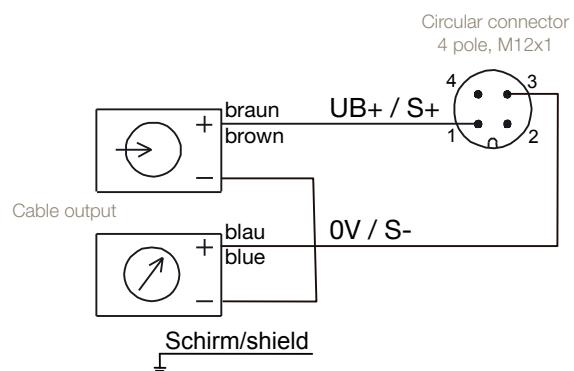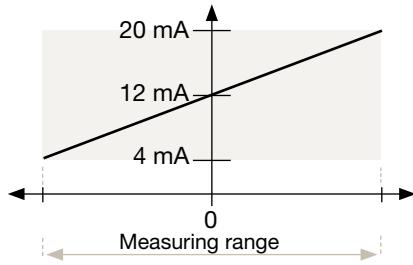


Part No.	Cable for force sensor
080-900446	Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m
080-900447	Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m
080-900456	Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m
080-900457	Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m


<sup>1)</sup>ATEX on request

Dimensions [mm]

**Version for ETH032**

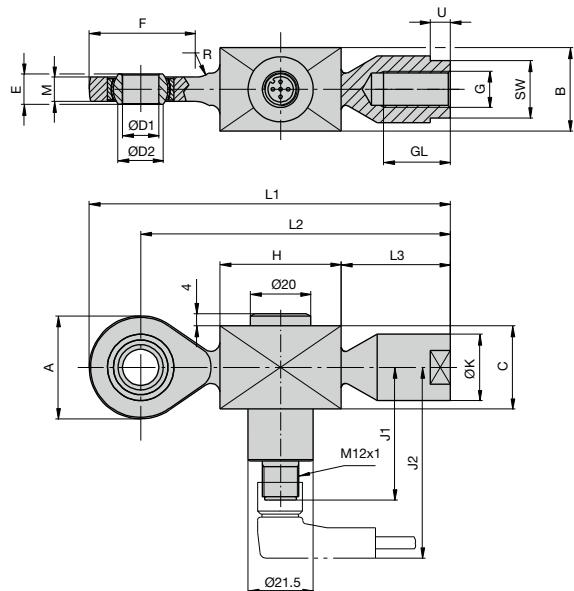

**Version for ETH050 & ETH080**

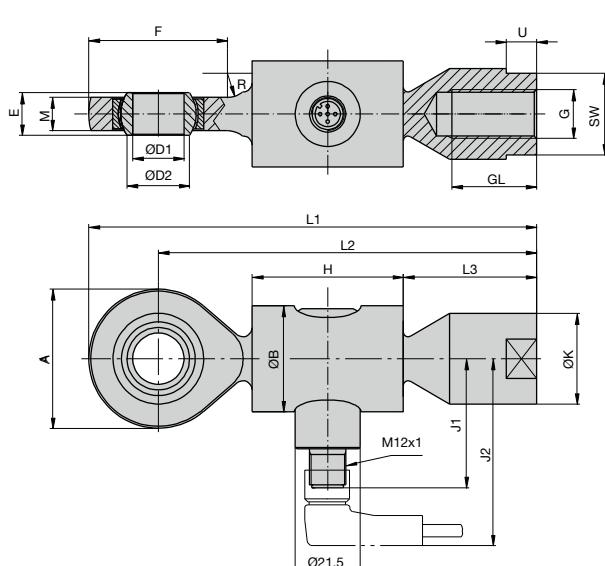


Dimensions [mm]

**Dimensions**

	A	B	ØB	C	ØD1	ØD2 0.008	E	F	G	GL	H	J1	J2	ØK	L1	L2	L3	M	SW <sup>1)</sup>	U
<b>for ETH032</b>	34	27	-	27	12	15	10	35	M10x1.25	21	40	44	63	22	119	102	36	8	19	8
<b>for ETH050</b>	46	-	35	-	17	20.7	14	46	M16x1.5	28	50	43	62	30	148	125	44	11	27	12
<b>for ETH080</b>	53	-	54	-	20	24.2	16	54	M20x1.5	33	54	44	63	35	171	144.5	54	13	32	13

<sup>1)</sup> SW: Width across flat

**Version for ETH100 & ETH125**

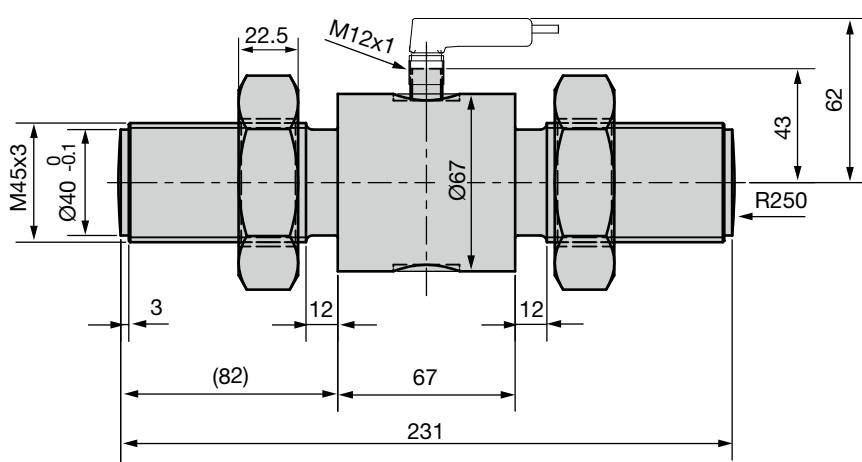


## <sup>1)</sup> Force sensors - Rear clevis with force sensor

In some force measurement applications, a force sensor on the cylinder rod is not possible or will affect the application's scope. For this case, we developed a special variant of the ETH cylinder, where the force sensor is integrated into the rear end of the cylinder. The advantage is that the sensor cable does not move with the rod.

All force sensors are configured as traction/thrust sensors.

Analog standard output signals 4...20 mA are available. The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC).

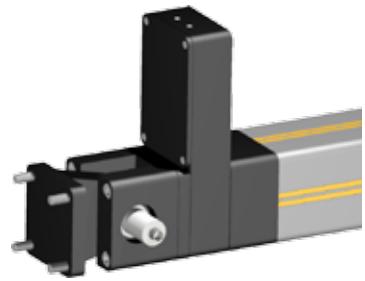

### Features

- Measuring range:  
Traction/thrust forces up to  $\pm 81.4$  kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- High long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting

Connection of the force sensors to Compax3 with Option M21 is possible.

### Technical Features



Rear clevis with force sensor for ETH...																					
	Unit	ETH032			ETH050			ETH080			ETH100	ETH125									
		M05	M10	M16	M05	M10	M20	M05	M10	M32	M10/M20	M10/M20									
Accuracy	[%]				1						2										
Material	-				Stainless steel						Stainless steel										
Protection class	-				IP67						IP67										
Measuring range	[kN]	$\pm 3.7$	$\pm 3.7$	$\pm 2.4$	$\pm 9.3$	$\pm 7.0$	$\pm 4.4$	$\pm 17.8$	$\pm 25.1$	$\pm 10.6$	$\pm 54.8$	$\pm 81.4$									
Accuracy	[N]	74.0	74.0	48.0	186.0	140.0	88.0	356.0	502.0	212.0	2192	3256									
Part No.	-	0112.034-01		0112.034-02		0122.034-01		0122.034-02		0122.034-03		0132.034-01		0132.034-02		0132.034-03		0142.034-01		0152.034-01	

Only for parallel configuration and cylinders with "F" mounting option (mounting thread on the cylinder body)

### Electrical connection

Power supply UB = 10...30 VDC


Analog output 4...20 mA (two-wire technology)

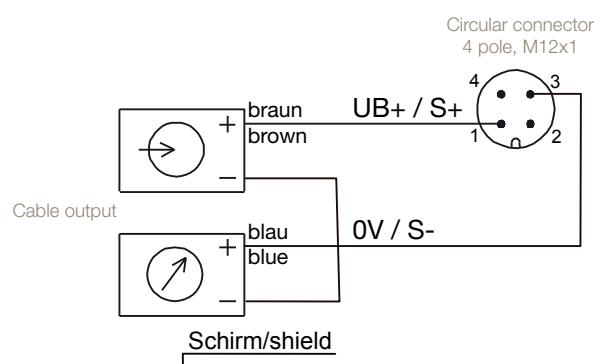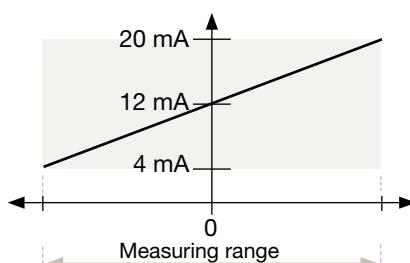

Part No.	Cable for force sensor
080-900446	Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m
080-900447	Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m
080-900456	Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m
080-900457	Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m

<sup>1)</sup>ATEX on request

**Version with fixing flange for ETH cylinder**

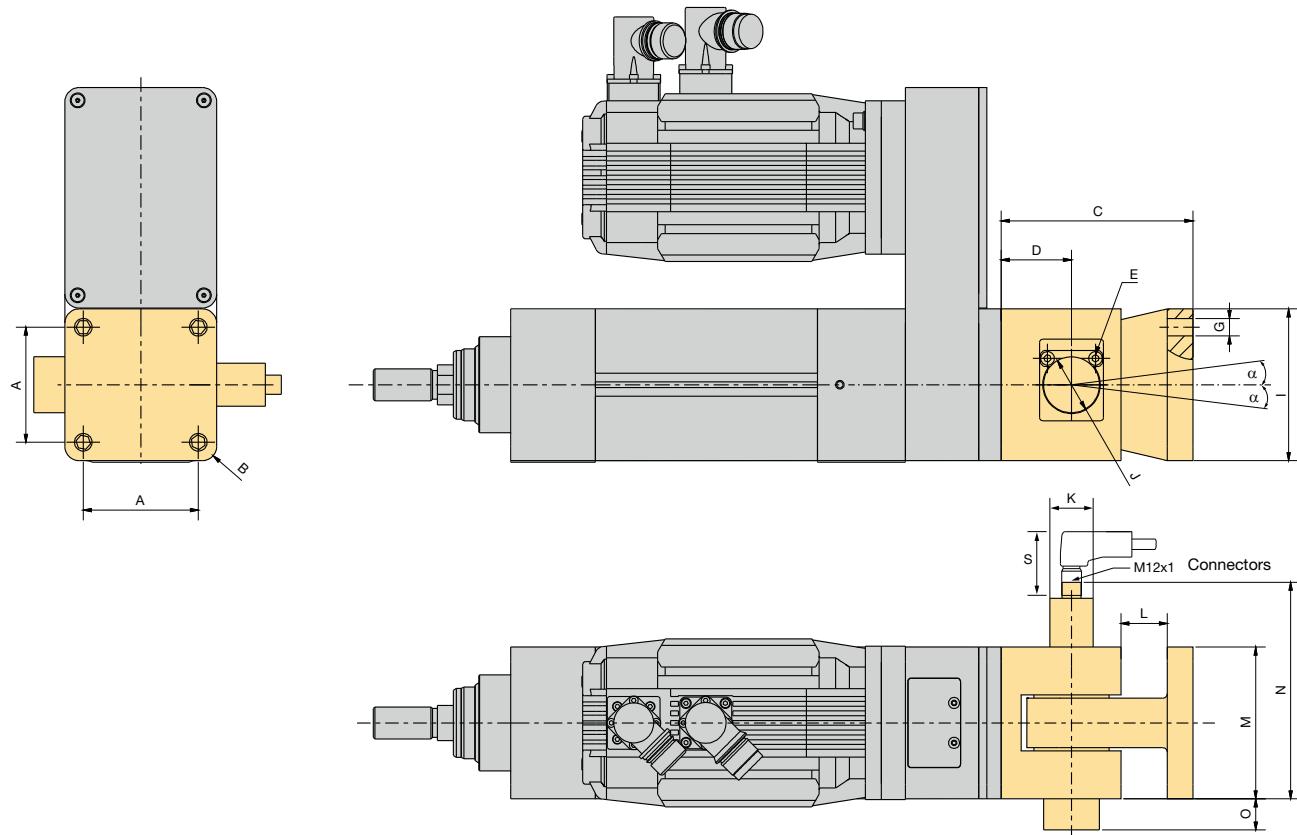

Dimensions [mm]

**Dimensions**

	A	B	C	D	E <sup>1)</sup>	G	I	ØJ	ØK	L	M	N	O	S	α
for ETH032	32.5	R7	72	27	SW3	6.6	46.5	20	27	12	46.5	98.25	6.75	19	±3.5°
for ETH050	46.5	R8.5	89	32	SW3	9	63.5	25	27	17	63.5	111.75	3.25	19	±4°
for ETH080	72	R9	123	47	SW4	11	95	35	27	29	95	135.5	0	19	±4°
for ETH100	89	R12.5	166	70	SW6	17	120	50	27	30	120	160.8	4.2	19	±4°
for ETH125	105	R20	196	75	SW6	22	150	50	27	40	150	175.8	0	19	±4°

<sup>1)</sup> SW: Width across flat

α: max. permissible deflection angle with reference to center axis

Please respect the notes in the ETH Manual (19x-550002) on the permissible screws and tightening torques.

## Initiators / Limit Switches<sup>1)</sup>

### Sensors

The position sensors can be mounted in the longitudinal grooves of the cylinder body and are directly immersible in the profile; projecting edges are thus avoided. The initiator cable is hidden under the yellow




cover. The permanent magnet integrated into the screw nut actuates the initiators. Fitting sensors available as accessories.



ETH032, ETH050 2 grooves each on 2 opposite sides.

ETH080, ETH100 2 grooves each on all sides.

**The following initiator types are available for the ETH cylinder series:**

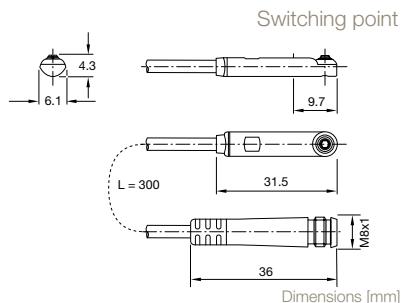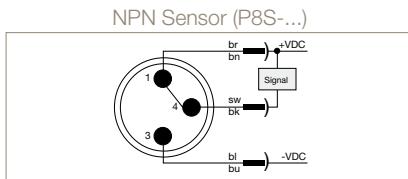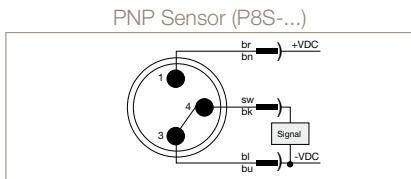


**Info:** Do only use PNP types for ETH with Compax3.

### Magnetic cylinder sensors

Type	Function	LED	Logic	Cable	Continuous current	Current consumption	Supply voltage	Switching frequency	compatible with Compax3, SLVD-N, TPD-M				
P8S-GPFLX	N.O.		PNP	3 m	max. 100 mA	max. 10 mA	10-30 VDC	1 kHz	yes				
P8S-GNFLX			NPN						No				
P8S-GPSHX			PNP	0.3 m cable with M8 connector					yes				
P8S-GNSHX			NPN	No									
P8S-GQFLX	N.C.		PNP	3 m					yes				
P8S-GMFLX			NPN						No				
P8S-GQSHX			PNP	0.3 m cable with M8 connector					yes				
P8S-GMSHX			NPN	No									



### ETH with Compax3, P-Series

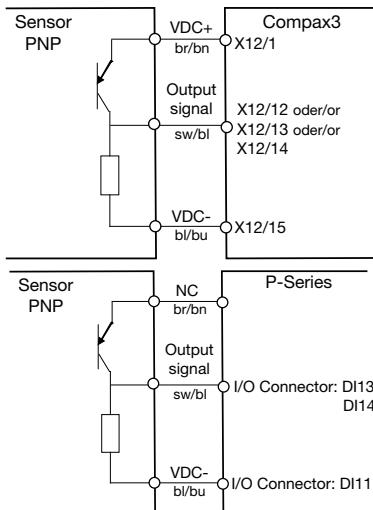

Variant 1: X12 Input - direct



Variant 2: X12 Input - via digital I/Os

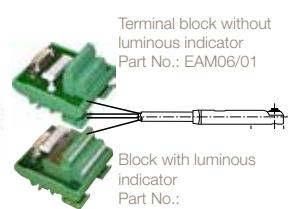

<sup>1)</sup>ATEX on request

# Drive Train Selection<sup>1)</sup>

## Example for Sizing with Predefined Drive Trains

In order to simplify the dimensioning process for a complete drive train, We have prepared an overview of predefined electro cylinders, gearboxes, motors and servo drives, which can be found on the following pages.

With a few parameters, you can directly find the order code for the required components.

Note the boundary conditions!

### The following application parameters are required:

- The equivalent axial force.  
(Calculation page 13 formula 3 with the forces determined as described on page 11).
- The maximum speed.



### Working with the drive train table

- Select the drive trains providing the required axial force (e.g. by drawing a vertical line).
- Then select from this choice the drive trains, that are able to travel at the required speed (e.g. by drawing a second vertical line).
- The suitable drive train can then be selected from the remaining choice, if necessary by comparing additional characteristics.

Please check if all given characteristics (such as max. acceleration, supply voltage etc.) are suitable for your application.

### Example:

Required data

Equivalent axial force: 5000 N  
Speed: 300 mm/s

		300 mm/s		5000 N											
Predefined Motion Packages	Cylinder / gearbox / motor Cylinder / motor														
Equivalent axial force in N	8000 6000 4000 2000														
Velocity / mm/s	1333 ... 800 600 400 200 0														
Characteristics															
Order code for Electro Cylinder															
Order code for Motor															
Order code for Gearbox															
Order code for Drive															
Order code for Motor cable															
Order code for Feedback cable															
MONGA... (standard) or MOKSA... (cable chain compatible)															
GBK 24... (cable chain compatible)															
Drive train characteristics															
Feedback cable order code															
Motor cable order code															
(... " Length code)															
For details please see <a href="http://www.parker.com/eme/smh">www.parker.com/eme/smh</a> & <a href="http://www.parker.com/eme/mh">www.parker.com/eme/mh</a>															

<sup>1)</sup> does not apply for ATEX Cylinder

## Predefined Motion Packages ETH032<sup>1)</sup>

### with Compax3, SLVD-N, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

	Equivalent axial force in N	Max. Speed	Equivalent axial force	Max. Acceleration	Lifetime	Screw lead	Supply voltage	Cylinder	
								mm	
Inline & parallel	4000	01	83	3000	1	135	5	230	ETH032M05A1BAAFMN0200A
	3000	02	165	3000	6	270	10	230	ETH032M10A1BAAFMN0200A
	2000	03	165	2000	8	1300	10	230	ETH032M16A1BAAFMN0200A
	1000	04	265	1900	8	1540	16	230	ETH032M05A1BAAFMN0200A
	0	05	265	1300	12	4800	16	230	ETH032M10A1BAAFMN0200A
	4000	06	83	3500	4	75	5	400	ETH032M05A1BAAFMN0200A
	3000	07	165	3280	8	190	10	400	ETH032M10A1BAAFMN0200A
	2000	08	265	2050	12	1225	16	400	ETH032M16A1BAAFMN0200A
	1000	09	333	2400	4	265	5	230	ETH032M05A1AACFMN0200A
	0	10	250	2700	4	185	5	230	ETH032M05A1AABFMN0200A
	4000	11	333	1100	4	2740	5	230	ETH032M05A1AABFMN0200A
	3000	12	160	1300	4	1660	5	230	ETH032M10A1AACFMN0200A
	2000	13	667	1230	8	9300	10	230	ETH032M10A1AACFMN0200A
	1000	14	400	1400	8	5500	10	230	ETH032M10A1AABFMN0200A
	0	15	667	580	8	>20000	10	230	ETH032M10A1AABFMN0200A
	800	16	1067	790	12	>20000	16	230	ETH032M16A1AACFMN0200A
	600	17	850	840	12	17780	16	230	ETH032M16A1AACFMN0200A
	400	18	1067	370	12	>20000	16	230	ETH032M16A1AABFMN0200A
	200	...							
	0								
	Velocity / mm/s								

#### Basic Application Assumptions:

- Stroke from 50 to 400 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Gearbox		Order Codes					
		Motor	Drive	Compax3	Motor Cable	Feedback cable	
PS60-003-S2/MU60-001	SMH60601,45112/65G44	C3S025V2F 11IxxTxxMxx			SLVD2N...		
PS60-003-S2/MU60-321	SMH8260038142/65A74	C3S025V2F 11IxxTxxMxx			SLVD2N...		
PS60-003-S2/MU60-001	SMH60601,45112/65G44	C3S015V4F 11IxxTxxMxx			TPDM020202....		
PS60-003-S2/MU60-321	SMH8260038142/65A74	C3S038V4F 11IxxTxxMxx			TPDM05...		
without gearbox	SMH8245038142/65A72	C3S063V2F 11IxxTxxMxx	MOK55/... (standard) or MOK54/... (cable chain compatible) GBK 24/... (cable chain compatible)		SLVD5N...	CAVOMOT... CAVORES...	
	SMH8260038142/65A74	C3S063V2F 11IxxTxxMxx			SLVD2N...		
	SMH60451,45112/65G42	C3S025V2F 11IxxTxxMxx			SLVD5N...		
	SMH60601,45112/65G44	C3S025V2F 11IxxTxxMxx			SLVD2N...		
	SMH8245038142/65A72	C3S063V2F 11IxxTxxMxx			SLVD5N...		
	SMH8260038142/65A74	C3S063V2F 11IxxTxxMxx			SLVD2N...		
	SMH60451,45112/65G42	C3S025V2F 11IxxTxxMxx			SLVD5N...		
	SMH8245038142/65A72	C3S063V2F 11IxxTxxMxx			SLVD2N...		
	SMH8260038142/65A74	C3S063V2F 11IxxTxxMxx			SLVD5N...		
	SMH60451,45112/65G42	C3S025V2F 11IxxTxxMxx			SLVD2N...		

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH050<sup>1)</sup>

### with Compax3, SLVD-N, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

	Cylinder	Max. Speed	Equivalent axial force	Max. Acceleration	Lifetime	Screw lead	Supply voltage					
								mm/s	N	m/s <sup>2</sup>	km	mm
<b>Equivalent axial force in N</b>												
		01	70	7950	0.5	130	5	230	ETH050M05A1BAAFMN0300A			
		02	70	6500	4.0	240	5	230	ETH050M10A1BAAFMN0300A			
		03	150	3950	1.0	1400	10	230	ETH050M20A1BAAFMN0300A			
		04	150	2250	8.0	7570	10	230	ETH050M05A1AACFMN0300A			
		05	300	1950	8.6	6940	20	230	ETH050M10A1AACFMN0300A			
		06	300	1750	15.0	9600	20	230	ETH050M20A1AACFMN0300A			
Inline & parallel		07	330	2400	4.0	4820	5	230	ETH050M05A1AACFMN0300A			
		08	70	2950	4.0	2520	5	230	ETH050M10A1AACFMN0300A			
		09	666	1220	8.0	>20000	10	230	ETH050M20A1AACFMN0300A			
		10	150	1480	8.0	>20000	10	230	ETH050M05A1AAFFMN0300A			
		11	1333	620	15.0	>20000	20	230	ETH050M10A1AAFFMN0300A			
		12	300	740	15.0	>20000	20	230	ETH050M20A1AAFFMN0300A			
		13	330	4500	4.0	730	5	400	ETH050M05A1AAFFMN0300A			
		14	230	5150	4.0	490	5	400	ETH050M10A1AAFFMN0300A			
		15	666	2280	8.0	7270	10	400	ETH050M20A1AAFFMN0300A			
		16	460	2600	8.0	4900	10	400	ETH050M05A1AADFMN0300A			
Inline		17	1333	1180	15.0	>20000	20	400	ETH050M10A1AADFMN0300A			
		18	920	1300	15.0	>20000	20	400	ETH050M20A1AADFMN0300A			
		19	330	7000	4.0	200	5	400	ETH050M05A1AADFMN0300A			
		20	230	8000	4.0	130	5	400	ETH050M10A1AADFMN0300A			
		21	666	3520	8.0	1980	10	400	ETH050M20A1AADFMN0300A			
		22	460	4000	8.0	1350	10	400	ETH050M05A1AAAFMN0300A			
		23	1333	1800	15.0	8820	20	400	ETH050M10A1AAAFMN0300A			
		24	920	2020	15.0	6240	20	400	ETH050M20A1AAAFMN0300A			
		...	800	600	400	200	0					
		<b>Velocity / mm/s</b>										

#### Basic Application Assumptions:

- Stroke from 50 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

		Order Codes					
Gearbox		Motor	Drive	Compax3	Motor Cable	Feedback cable	
PS60-003-S2/MU60-321	SMH8256038142/65A74	C3S063V2F 11IxxTxxMxx C3S025V2F 11IxxTxxMxx C3S063V2F 11IxxTxxMxx C3S025V2F 11IxxTxxMxx C3S063V2F 11IxxTxxMxx C3S025V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		SLVD-N / TPD-M
without gearbox	SMH8245038142/65A72	C3S063V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		Motor Cable
	SMH8210038142/65A72	C3S025V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		Feedback cable
	SMH8245038142/65A72	C3S063V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		SLVD-N / TPD-M
	SMH8210038142/65A72	C3S025V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		Motor Cable
	SMH8245038142/65A72	C3S063V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		Feedback cable
	SMH8210038142/65A72	C3S025V2F 11IxxTxxMxx			SLVD5N... SLVD2N... SLVD5N... SLVD2N... SLVD5N... SLVD2N...		SLVD-N / TPD-M
	SMH10056065ET2/65A74	C3S075V4F 11IxxTxxMxx			TPDM05... TPDM05... TPDM05... TPDM05... TPDM05... TPDM05...		CAVOMOT...
	SMH10030065ET2/65A74	C3S038V4F 11IxxTxxMxx			TPDM05... TPDM05... TPDM05... TPDM05... TPDM05... TPDM05...		CAVORES...
	SMH10056065ET2/65A74	C3S075V4F 11IxxTxxMxx			TPDM05... TPDM05... TPDM05... TPDM05... TPDM05... TPDM05...		CAVOMOT...
	SMH10030065ET2/65A74	C3S038V4F 11IxxTxxMxx			TPDM05... TPDM05... TPDM05... TPDM05... TPDM05... TPDM05...		CAVORES...
	SMH10056065ET2/65A74	C3S075V4F 11IxxTxxMxx			TPDM05... TPDM05... TPDM05... TPDM05... TPDM05... TPDM05...		CAVOMOT...
without gearbox	MH10560089192/65A74	C3S150V4F 11IxxTxxMxx			TPDM10... TPDM05... TPDM10... TPDM05... TPDM10... TPDM05...		CAVORES...
	MH10530089192/65A74	C3S075V4F 11IxxTxxMxx			TPDM10... TPDM05... TPDM10... TPDM05... TPDM10... TPDM05...		CAVOMOT...
	MH10560089192/65A74	C3S150V4F 11IxxTxxMxx			TPDM10... TPDM05... TPDM10... TPDM05... TPDM10... TPDM05...		CAVORES...
	MH10530089192/65A74	C3S075V4F 11IxxTxxMxx			TPDM10... TPDM05... TPDM10... TPDM05... TPDM10... TPDM05...		CAVOMOT...
	MH10560089192/65A74	C3S150V4F 11IxxTxxMxx			TPDM10... TPDM05... TPDM10... TPDM05... TPDM10... TPDM05...		CAVORES...
	MH10530089192/65A74	C3S075V4F 11IxxTxxMxx			TPDM10... TPDM05... TPDM10... TPDM05... TPDM10... TPDM05...		CAVOMOT...

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH080<sup>1)</sup>


### with Compax3, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

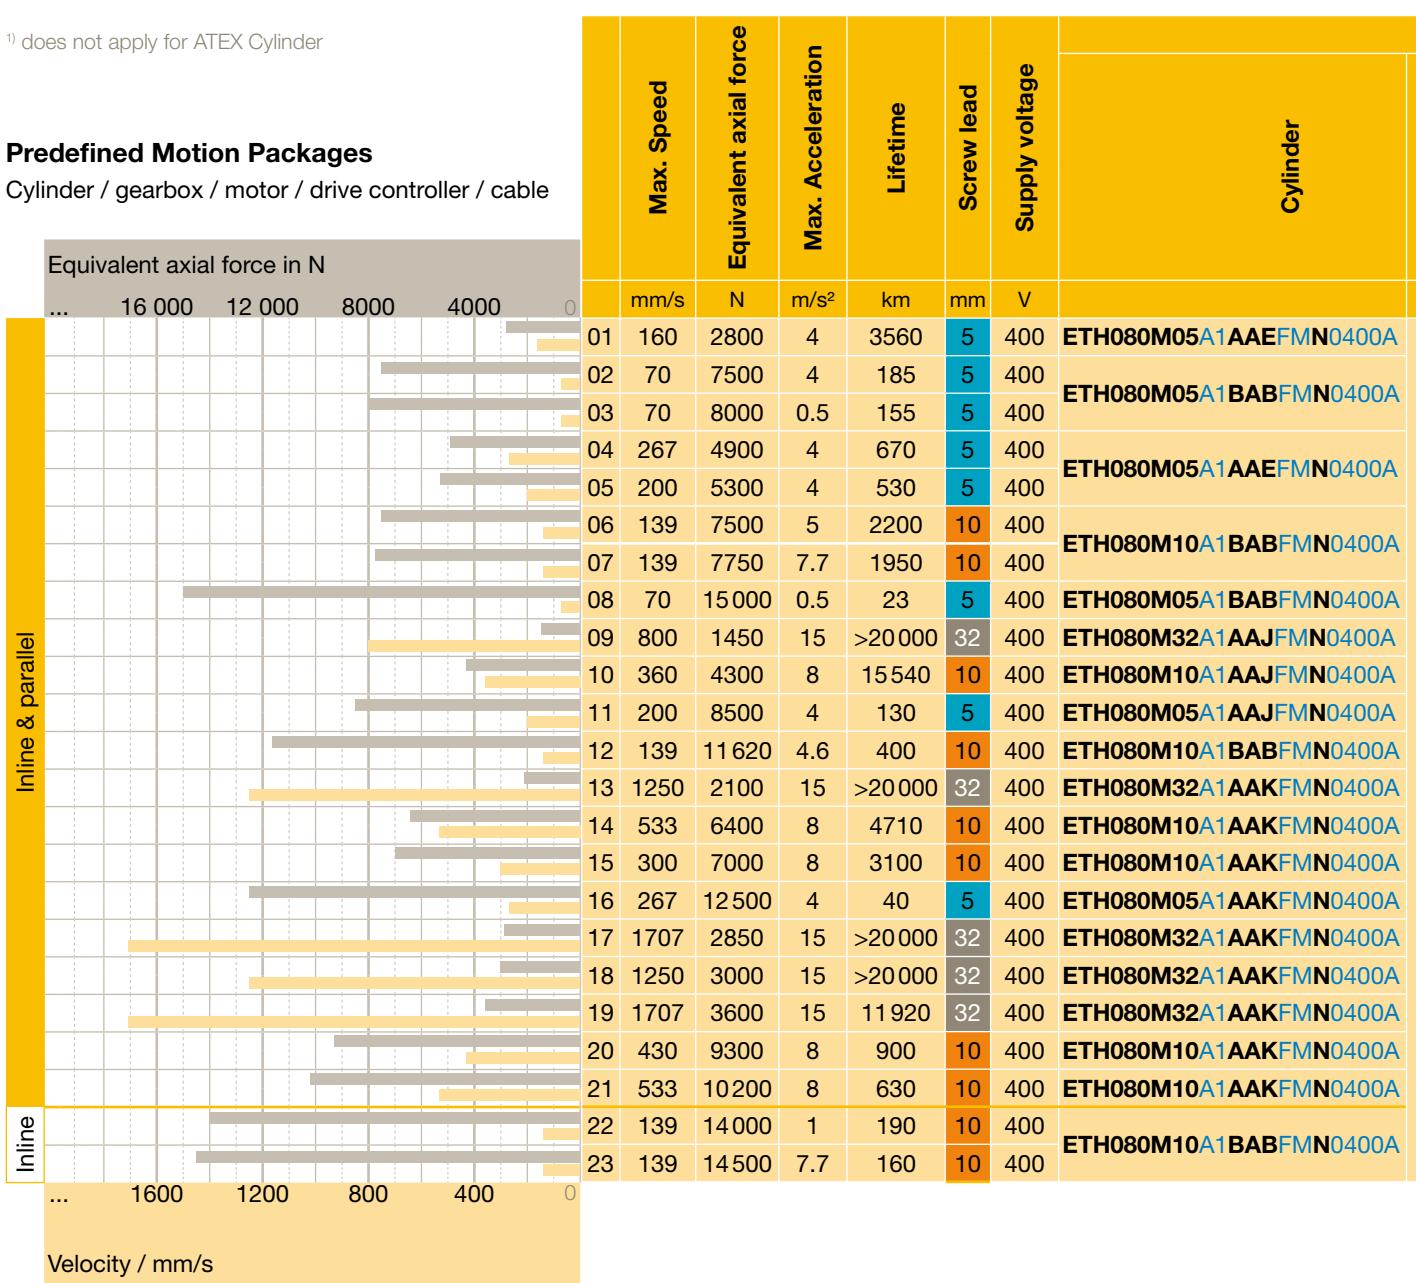

#### Basic Application Assumptions:

- Stroke from 50 to 800 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes					
Gearbox	Motor	Drive	Compax3	Motor Cable	Feedback cable
without gearbox	<b>SMH8230035192/65A74</b>	C3S038V4F 11lxTxxMxx			
PS90-003-S2/MU90-085	<b>SMH8256038192/65A74</b>	C3S038V4F 11lxTxxMxx	①	TPDM05...	
	<b>SMH8230038192/65A74</b>	C3S038V4F 11lxTxxMxx			
without gearbox	<b>SMH10056065192/65A74</b>	C3S075V4F 11lxTxxMxx	②	TPDM020202...	
	<b>SMH10030065192/65A74</b>	C3S038V4F 11lxTxxMxx			
PS90-003-S2/MU90-088	<b>SMH10056065192/65A74</b>	C3S038V4F 11lxTxxMxx	③	TPDM0808...	
	<b>SMH10030065192/65A74</b>	C3S075V4F 11lxTxxMxx			
without gearbox	<b>SMH11530107242/65A74</b>	C3S075V4F 11lxTxxMxx	GBK 24/... (cable chain compatible)	TPDM05...	
		C3S075V4F 11lxTxxMxx			
PS90-003-S2/MU90-345	<b>SMH11530108192/65A74</b>	C3S075V4F 11lxTxxMxx	CAVOMOT...	TPDM0808...	CAVORES...
without gearbox	<b>SMH14230155242/65A74</b>	C3S150V4F 11lxTxxMxx			
	<b>SMH14256155242/65A74</b>	C3S150V4F 11lxTxxMxx			
	<b>SMH14230155242/65A74</b>	C3S150V4F 11lxTxxMxx			
	<b>SMH14256155242/65A74</b>	C3S150V4F 11lxTxxMxx			
	<b>MH14545225243/65A74</b>	C3S300V4F 11lxTxxMxx			
	<b>MH14530225243/65A74</b>	C3S150V4F 11lxTxxMxx			
	<b>MH14545285243/65A74</b>	C3S300V4F 11lxTxxMxx			
	<b>MH14530225242/65A74</b>	C3S150V4F 11lxTxxMxx			
	<b>MH14545285243/65A74</b>	C3S300V4F 11lxTxxMxx			
	<b>SMH11530108192/65A74</b>	C3S075V4F 11lxTxxMxx	①	TPDM0808...	
PS90-003-S2/MU90-345	<b>SMH11556108192/65A74</b>	C3S150V4F 11lxTxxMxx			

- ❶ MOK55/... (standard) or MOK54/... (cable chain compatible)
- ❷ MOK56/... (standard) or MOK57/... (cable chain compatible)
- ❸ MOK59/... (standard) or MOK64/... (cable chain compatible)

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH100, ETH125<sup>1)</sup>

### with Compax3, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder  
Contact customer service team for bore size 100mm and 125mm

### Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

	Max. Speed	Equivalent axial force	Max. Acceleration	Lifetime	Screw lead	Supply voltage	Cylinder	
							mm	V
<b>Equivalent axial force in N</b>								
...  ...  ...	01	80	12000	4	6750	10	400	<b>ETH100M10A1P1CFMN0600A</b>
	02	160	6000	4	>20000	20	400	<b>ETH100M20A1P1CFMN0600A</b>
	03	100	23000	3	900	10	400	<b>ETH100M10A1P1CFMN0600A</b>
	04	80	30000	2	500	10	400	<b>ETH100M10A1P1CFMN0600A</b>
	05	200	12000	4	20000	20	400	<b>ETH100M20A1P1CFMN0600A</b>
	06	150	14000	8	12500	20	400	<b>ETH100M20A1P1CFMN0600A</b>
	07	300	12000	5	20000	10	400	<b>ETH100M10A1K1LFMN0600A</b>
	08	600	5000	10	>20000	20	400	<b>ETH100M20A1K1KFMN0600A</b>
	09	300	30000	4	500	10	400	<b>ETH100M10A1K1LFMN0600A</b>
	10	600	18000	4	6000	20	400	<b>ETH100M20A1K1LFMN0600A</b>
<b>Velocity / mm/s</b>								
...  ...  ...	01	250	33000	4	1500	10	400	<b>ETH125M10A1K1LFMN0500A</b>
	02	267	73000	2	100	10	400	<b>ETH125M10A1K1MFMN0500A</b>
	03	126	60000	3	1500	20	400	<b>ETH125M20A1K1MFMN0500A</b>
	04	790	45000	4	3250	20	400	<b>ETH125M20A1K1MFMN0500A</b>
	05	100	58000	2	250	10	400	<b>ETH125M10A1P1KFMN0500A</b>
	06	71	70000	2	100	10	400	<b>ETH125M10A1P1KFMN0500A</b>
	07	126	70000	3	900	20	400	<b>ETH125M20A1P1KFMN0500A</b>
	08	84	85000	1	500	20	400	<b>ETH125M20A1P1KFMN0500A</b>

### Basic Application Assumptions:

- Stroke from 100 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes							
Gearbox	Motor	Drive	Compax3	Motor Cable	Feedback cable	Drive	TPD-M
PS115-005-S2/MU115-005	SMH10056065242/65A74	C3S075V4F11IxxTxxMxx	❶	❷	❸	TPDM0808...	❹
PS115-005-S2/MU115-005	SMH10030065242/65A74	C3S038V4F11IxxTxxMxx	❶			TPDM05...	
PS115-004-S2/MU115-026	SMH14230155242/65A74	C3S150V4F11IxxTxxMxx	❷			TPDM15...	
PS115-005-S2/MU115-026	SMH14230155242/65A74	C3S150V4F11IxxTxxMxx	❷			TPDM15...	
PS115-004-S2/MU115-026	SMH14230155242/65A74	C3S150V4F11IxxTxxMxx	❷			TPDM15...	
PS115-005-S2/MU115-026	SMH14230155242/65A74	C3S150V4F11IxxTxxMxx	❷			TPDM15...	
without gearbox	SMH17030355382/65A74	C3S150V4F11IxxTxxMxx	❸	❺	❻	CAVOMOT...	❻
	MH14545285242/65A74	C3S300V4F11IxxTxxMxx	❸			CAVORES...	
	MH20530905382/65A74	C3H050V4F11IxxTxxMxx	❹			TPDM15...	
	MH20530905382/65A74	C3H050V4F11IxxTxxMxx	❹			TPDM30...	
	MH20530705383/65A74	C3H050V4F11IxxTxxMxx	❹			--	
without gearbox	MH20530705383/65A74	C3H090V4F11IxxTxxMxx	❺	❻	❻	--	❻
	MH265301505483M654	C3H090V4F10IxxTxxMxx	❺			--	
	MH265302205483M654	C3H125V4F10IxxTxxMxx	❺			--	
	MH265302205483M654	C3H125V4F10IxxTxxMxx	❺			--	
PE700410M1802153880	MH20530285383/65A74	C3S300V4F11IxxTxxMxx	❻	❻	❻	--	❻
PE700510M1802153880	MH20530285383/65A74	C3S300V4F11IxxTxxMxx	❻			--	
PE700410M1802153880	MH20530705383/65A74	C3H050V4F11IxxTxxMxx	❺			--	
PE700510M1802153880	MH20530705383/65A74	C3H050V4F11IxxTxxMxx	❺			--	

- ❶ MOK55/... (standard) or MOK54/... (cable chain compatible)
- ❷ MOK56/... (standard) or MOK57/... (cable chain compatible)
- ❸ MOK59/... (standard) or MOK64/... (cable chain compatible)
- ❹ MOK61/...,
- ❺ MOK62/...
- ❻ GBK24/... (cable chain compatible)
- ❼ REK42/... (standard) or REK41/... (cable chain compatible)

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application


Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

## Predefined Motion Packages ETH032, ETH050, ETH080 (P-Series) <sup>1)</sup>

### with Compax3, SLVD-N, TPD-M, P-Series

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

<sup>1)</sup> does not apply for ATEX Cylinder  
Contact customer service team for bore size 100mm and 125mm

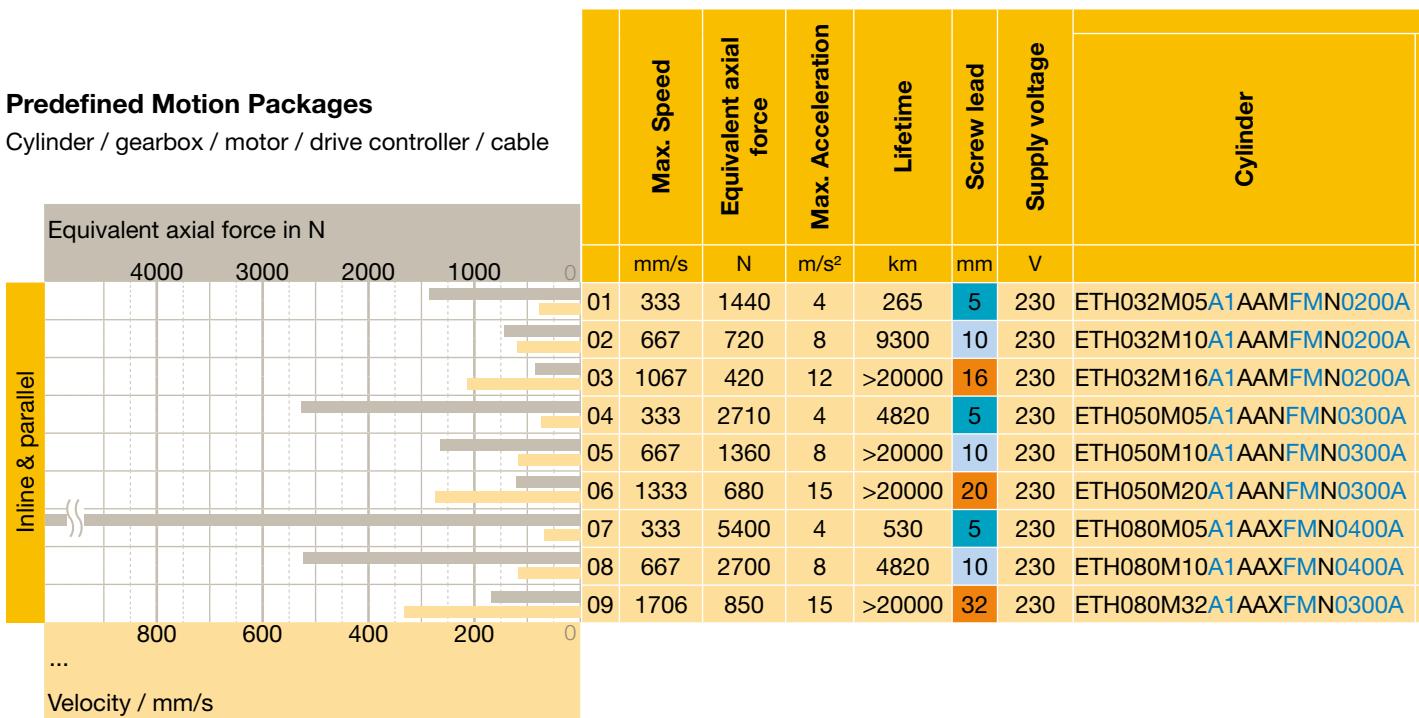

### Motor

P M-F	BL	04	A	M	K	2
Flange size	Shaft Power	Rate Speed (RPM)	Shaft Key	Oil seal, Brake		
AL 40mm	R5 50W	A* 3,000rpm	N No key	Omit No oil		
BL 60mm	01 100W	D 2,000rpm	K Shaft key	Seal and Brake		
CL 80mm	02 200W	G 1,500rpm	Encoder	1 Oil seal		
E 130mm	---	M 1,000rpm	M BISS-C Multi Turn	2 Brake		
F 180mm	35 3,500W			3 Both		

\*Standard

### Drive

P D -	04	P
Power	Control Interface	
04 400W	P Pulse type	
10 1,000W	C EtherCAT Type	
35 3,500W		

### Basic Application Assumptions:

- Stroke from 50 to 400 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
  - with parallel motor: respect transmissible torque depending on the motor speed n
  - permissible axial thrust forces must be respected
  - Ambient conditions
  - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes			
Gearbox	Motor	Drive Compax3	
			Motor Cable
without gear box	<b>PM-FB04AMxx</b>	PD-04x-xxx	
without gear box	<b>PM-FC08AMxx</b>	PD-10x-xxx	APCS - P
without gear box	<b>PM-FE10AMxx</b>	PD-10x-xxx	APCS - E

Reference only.  
For more information, pleased contact Parker.

## Cable

APCS	-	P	N	03	LS	
		Cable	Cable type	Cable length	Option code	
P	Power Cable	N	Standard (Normal Application)	03   3m	BxxxQS	FxL Series Brake Cable
E	Encoder Cable			05   5m	PxxxLS	FxL Series Power Cable
B	Brake Cable	F	High Flex (Robot Application)	10   10m	PxxxHS	FE Series Power Cable
				20   20m	PxxNB	FE Series Brake Type Power Cable
					PxxIS	FF Series(up to 3.5kW) Power Cable
					PxxPB	FF Series(up to 3.5kW) Brake Type Power Cable
					PxxJS	FF Series(up to 5.0kW) Power Cable
					PxxLB	FF Series(up to 5.0kW) Brake Type Power Cable
					ExxES	FxL Series Single-turn Encoder Cable
					ExxES1	FxL Series Multi-turn Encoder Cable
					ExxDS	FE/FF Series Single-turn Encoder Cable
					ExxDS1	FE/FF Series Multi-turn Encoder Cable

Order codes:

**bold:** mandatory so that the package is combinable

*italics:* recommended/standard

**blue:** must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.



7 Mounting type	
F	Thread on the cylinder body ( <b>standard</b> ) (ETH100, ETH125 does not have a mounting thread on the underside)
B	Foot mounting <sup>6), 7)</sup> (For ETH100, ETH125 only available in protection class option A)
C	Rear Clevis <sup>6)</sup>
D	Centre trunnion mounting (not with motor mounting positions E, F, J, K), for lubricating option "1", the lubrication port is always in 6 o'clock position
E	Rear Eye Mounting <sup>6)</sup>
G	Mounting Flanges <sup>7)</sup> (only with motor mounting positions A, B, C, D) (For ETH100, ETH125 only available in protection class option A)
H	Rear plate <sup>6)</sup> (For ETH125 only available in protection class option A)
J	Front plate <sup>7)</sup> (For ETH125 only available in protection class option A)
N	Rear Plate & Front Plate <sup>6), 7)</sup> (For ETH125 only available in protection class option A)
X	customized - please contact us
8 Thrust rod	
M	External thread ( <b>standard</b> )
F	Internal Thread
K	Internal thread (for the reception of the force sensor with external thread) (only for ETH100, ETH125)
C	Rod clevis <sup>8)</sup> (stainless steel with protection class "B" and "C"; standard with protection class "A")
S	Spherical Rod Eye (stainless steel with protection class "B" and "C"; standard with protection class "A") (For ETH125 only available in protection class option A)
R	Parallel guiding with ball bushing <sup>8)</sup> (not with motor mounting positions E, F, J, K) (available only in protection class option A)
T	Parallel guiding with sliding bushing <sup>8)</sup> (not with motor mounting positions E, F, J, K)
L	Alignment Coupler (available only in protection class option A)
X	customized - please contact us
9 Option	
N	Standard
A	Designation for ATEX Cylinder <sup>9)</sup>

10 Stroke in mm				
	ETH032	ETH050	ETH080	ETH100/ ETH125
0050	•	•		
0100	•	•	•	•
0150	•	•	•	•
0200	•	•	•	•
0300	•	•	•	•
0400			•	•
0600			•	•
1000	•			•
1200		•		
1600			•	•
XXXX	50...1000	50...1200	50...1600	100...2000 customized in steps of 1 mm


11 Protection class	
A	IP54 with galvanized screws
B	IP 54 stainless version with VA screws
C	IP 65 like B + protective lacquer and specially sealed

12 Optional (only customized cylinders)	
Uxx	Unique Version
Here, a number for customized cylinders is assigned, please contact us	
with ATEX Cylinders <sup>9)</sup>	
000	Standard ATEX Cylinder
xxx	ATEX release xxx ATEX Applications-Identification No. xxx

- <sup>1)</sup> ETH080-ETH125 features 2 grooves each on all 4 sides (i.e. Code B=A or D=C, F=E, H=G, K=J), therefore codes A, C, E, G, J are possible for ETH080-ETH125.
- <sup>2)</sup> With parallel configuration, the motor may block access to the sensors and the lubrication port.
- <sup>3)</sup> When selecting the relubrication options 2-5, the standard lubrication port is without function.
- <sup>4)</sup> Please check cylinder motor/gearbox combination with the aid of the table ("Motor Mounting Options" see page <OV>). Order Code SMH100-B5/14: "SMH100\_\_\_\_\_ET..." (the motor shaft diameter is replaced by the term "ET") (not in the motors catalog) only with feedback: Resolver, A7
- <sup>6)</sup> Not with motor mounting options A & B.
- <sup>7)</sup> Not for thrust rod R, T
- <sup>8)</sup> Not for ETH100, ETH125
- <sup>9)</sup> Please observe the explanations "ETH - Electro Thrust Cylinder for ATEX Environment" see page 12

## Software & Tools

- Actuator database
  - A special actuator database is available in the Compax3 ServoManager. You can simply enter the ETH type code for automatic controller parameterization.
- CAD-Configurator
  - Configure your electro cylinder CAD data online.  
[www.parker.com/eme/eth](http://www.parker.com/eme/eth)
- Dimensioning tool "EL-Sizing"
  - A dimensioning tool simplifies the dimensioning process.  
[www.parker.com/eme/eth](http://www.parker.com/eme/eth)







# Parker's Motion & Control Technologies

**At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call +82-31-379-0220**



## Aerospace

### Key Markets

- Aftermarket services
- Commercial transports
- Engines
- General & business aviation
- Helicopters
- Launch vehicles
- Military aircraft
- Missiles
- Power generation
- Regional transports
- Unmanned aerial vehicles

### Key Products

- Control systems & actuation products
- Engine systems & components
- Fluid conveyance systems & components
- Fluid metering, delivery & atomization devices
- Fuel systems & components
- Fuel tank inerting systems
- Hydraulic systems & components
- Thermal management
- Wheels & brakes

## Fluid Control

### Key Markets

- Agriculture
- Air conditioning
- Construction Machinery
- Food & beverage
- Industrial machinery
- Life sciences
- Oil & gas
- Precision cooling
- Process
- Refrigeration
- Transportation

### Key Products

- Accumulators
- Advanced actuators
- CO<sub>2</sub> controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Heat exchangers
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Smart pumps
- Solenoid valves
- Thermostatic expansion valves

## Electromechanical

### Key Markets

- Aerospace
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

### Key Products

- AC/DC drives & systems
- Electric actuators, gantry robots & slides
- Electrohydraulic actuation systems
- Electromechanical actuation systems
- Human machine interface
- Linear motors
- Stepper motors, servo motors, drives & controls
- Structural extrusions

## Filtration

### Key Markets

- Aerospace
- Food & beverage
- Industrial plant & equipment
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation & renewable energy
- Process
- Transportation
- Water Purification

### Key Products

- Analytical gas generators
- Compressed air filters & dryers
- Engine air, coolant, fuel & oil filtration systems
- Fluid condition monitoring systems
- Hydraulic & lubrication filters
- Hydrogen, nitrogen & zero air generators
- Instrumentation filters
- Membrane & fiber filters
- Microfiltration
- Sterile air filtration
- Water desalination & purification filters & systems



## Fluid & Gas Handling

### Key Markets

- Aerial lift
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Life sciences
- Marine
- Mining
- Mobile
- Oil & gas
- Renewable energy
- Transportation

### Key Products

- Check valves
- Connectors for low pressure fluid conveyance
- Deep sea umbilicals
- Diagnostic equipment
- Hose couplings
- Industrial hose
- Mooring systems & power cables
- PTFE hose & tubing
- Quick couplings
- Rubber & thermoplastic hose
- Tube fittings & adapters
- Tubing & plastic fittings

## Hydraulics

### Key Markets

- Aerial lift
- Agriculture
- Alternative energy
- Construction machinery
- Forestry
- Industrial machinery
- Machine tools
- Marine
- Material handling
- Mining
- Oil & gas
- Power generation
- Refuse vehicles
- Renewable energy
- Truck hydraulics
- Turf equipment

### Key Products

- Accumulators
- Cartridge valves
- Electrohydraulic actuators
- Human machine interfaces
- Hybrid drives
- Hydraulic cylinders
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Hydrostatic steering
- Integrated hydraulic circuits
- Power take-offs
- Power units
- Rotary actuators
- Sensors

## Pneumatics

### Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

### Key Products

- Air preparation
- Brass fittings & valves
- Manifolds
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves & controls
- Quick disconnects
- Rotary actuators
- Rubber & thermoplastic hose & couplings
- Structural extrusions
- Thermoplastic tubing & fittings
- Vacuum generators, cups & sensors

## Process Control

### Key Markets

- Alternative fuels
- Biopharmaceuticals
- Chemical & refining
- Food & beverage
- Marine & shipbuilding
- Medical & dental
- Microelectronics
- Nuclear Power
- Offshore oil exploration
- Oil & gas
- Pharmaceuticals
- Power generation
- Pulp & paper
- Steel
- Water/wastewater

### Key Products

- Analytical Instruments
- Analytical sample conditioning products & systems
- Chemical injection fittings & valves
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves, regulators & digital flow controllers
- Industrial mass flow meters/controllers
- Permanent no-weld tube fittings
- Precision industrial regulators & flow controllers
- Process control double block & bleeds
- Process control fittings, valves, regulators & manifold valves
- Regulators & manifold valves

## Sealing & Shielding

### Key Markets

- Aerospace
- Chemical processing
- Consumer
- Fluid power
- General industrial
- Information technology
- Life sciences
- Microelectronics
- Military
- Oil & gas
- Power generation
- Renewable energy
- Telecommunications
- Transportation

### Key Products

- Dynamic seals
- Elastomeric o-rings
- Electro-medical instrument design & assembly
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- High temperature metal seals
- Homogeneous & inserted elastomeric shapes
- Medical device fabrication & assembly
- Metal & plastic retained composite seals
- Shielded optical windows
- Silicone tubing & extrusions
- Thermal management
- Vibration dampening

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates**, Dubai  
Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria**, Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe**,  
Wiener Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easternurope@parker.com

**AZ – Azerbaijan**, Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium**, Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria**, Sofia  
Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus**, Minsk  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland**, Etoy  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic**, Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany**, Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark**, Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain**, Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland**, Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France**, Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece**, Athens  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary**, Budaörs  
Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland**, Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy**, Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan**, Almaty  
Tel: +7 7273 561 000  
parker.easternurope@parker.com

**NL – The Netherlands**, Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway**, Asker  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland**, Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal**, Leca da Palmeira  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania**, Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia**, Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden**, Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia**, Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia**, Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey**, Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine**, Kiev  
Tel +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom**, Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa**, Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada**, Milton, Ontario  
Tel: +1 905 693 3000

**US – USA**, Cleveland  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia**, Castle Hill  
Tel: +61 (0)2-9634 7777

**CN – China**, Shanghai  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India**, Mumbai  
Tel: +91 22 6513 7081-85

**JP – Japan**, Tokyo  
Tel: +81 (0)3 6408 3901

**KR – South Korea**, Seoul  
Tel: +82 2 6344 0170

**MY – Malaysia**, Shah Alam  
Tel: +60 3 7849 0800

**NZ – New Zealand**, Mt Wellington  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand**, Bangkok  
Tel: +662 186 7000-99

**TW – Taiwan**, Taipei  
Tel: +886 2 2298 8987

## South America

**AR – Argentina**, Buenos Aires  
Tel: +54 3327 44 4129

**BR – Brazil**, São José dos Campos  
Tel: +55 800 727 5374

**CL – Chile**, Santiago  
Tel: +56 2 623 1216

**MX – Mexico**, Toluca  
Tel: +52 72 2275 4200

## Parker Hannifin Corporation

Automation Korea Division  
23, Jangangongdan 1-gil Jangan-myeon,  
Hwaseong-si, Gyeonggi-do, 445-941, Korea  
Tel: 82-31-379-0220 Fax: 82-31-379-2349  
www.parker.com  
[http://solutions.parker.com/AUG\\_EM](http://solutions.parker.com/AUG_EM)

